

LED Steplighting


Energy-Efficient Passage Lighting
June 2016





CSL Steplights provide a slim silhouette with a soft glow that will guide the way on any internal or external path. The Steplights can be dimmed, and illumination options include White or Amber light.

Arch	6
Channel	16
Edge	14
Form	10
Groove	8
Lunar	2
Notch	4
Sleek-Full	12
Sleek-Half	13

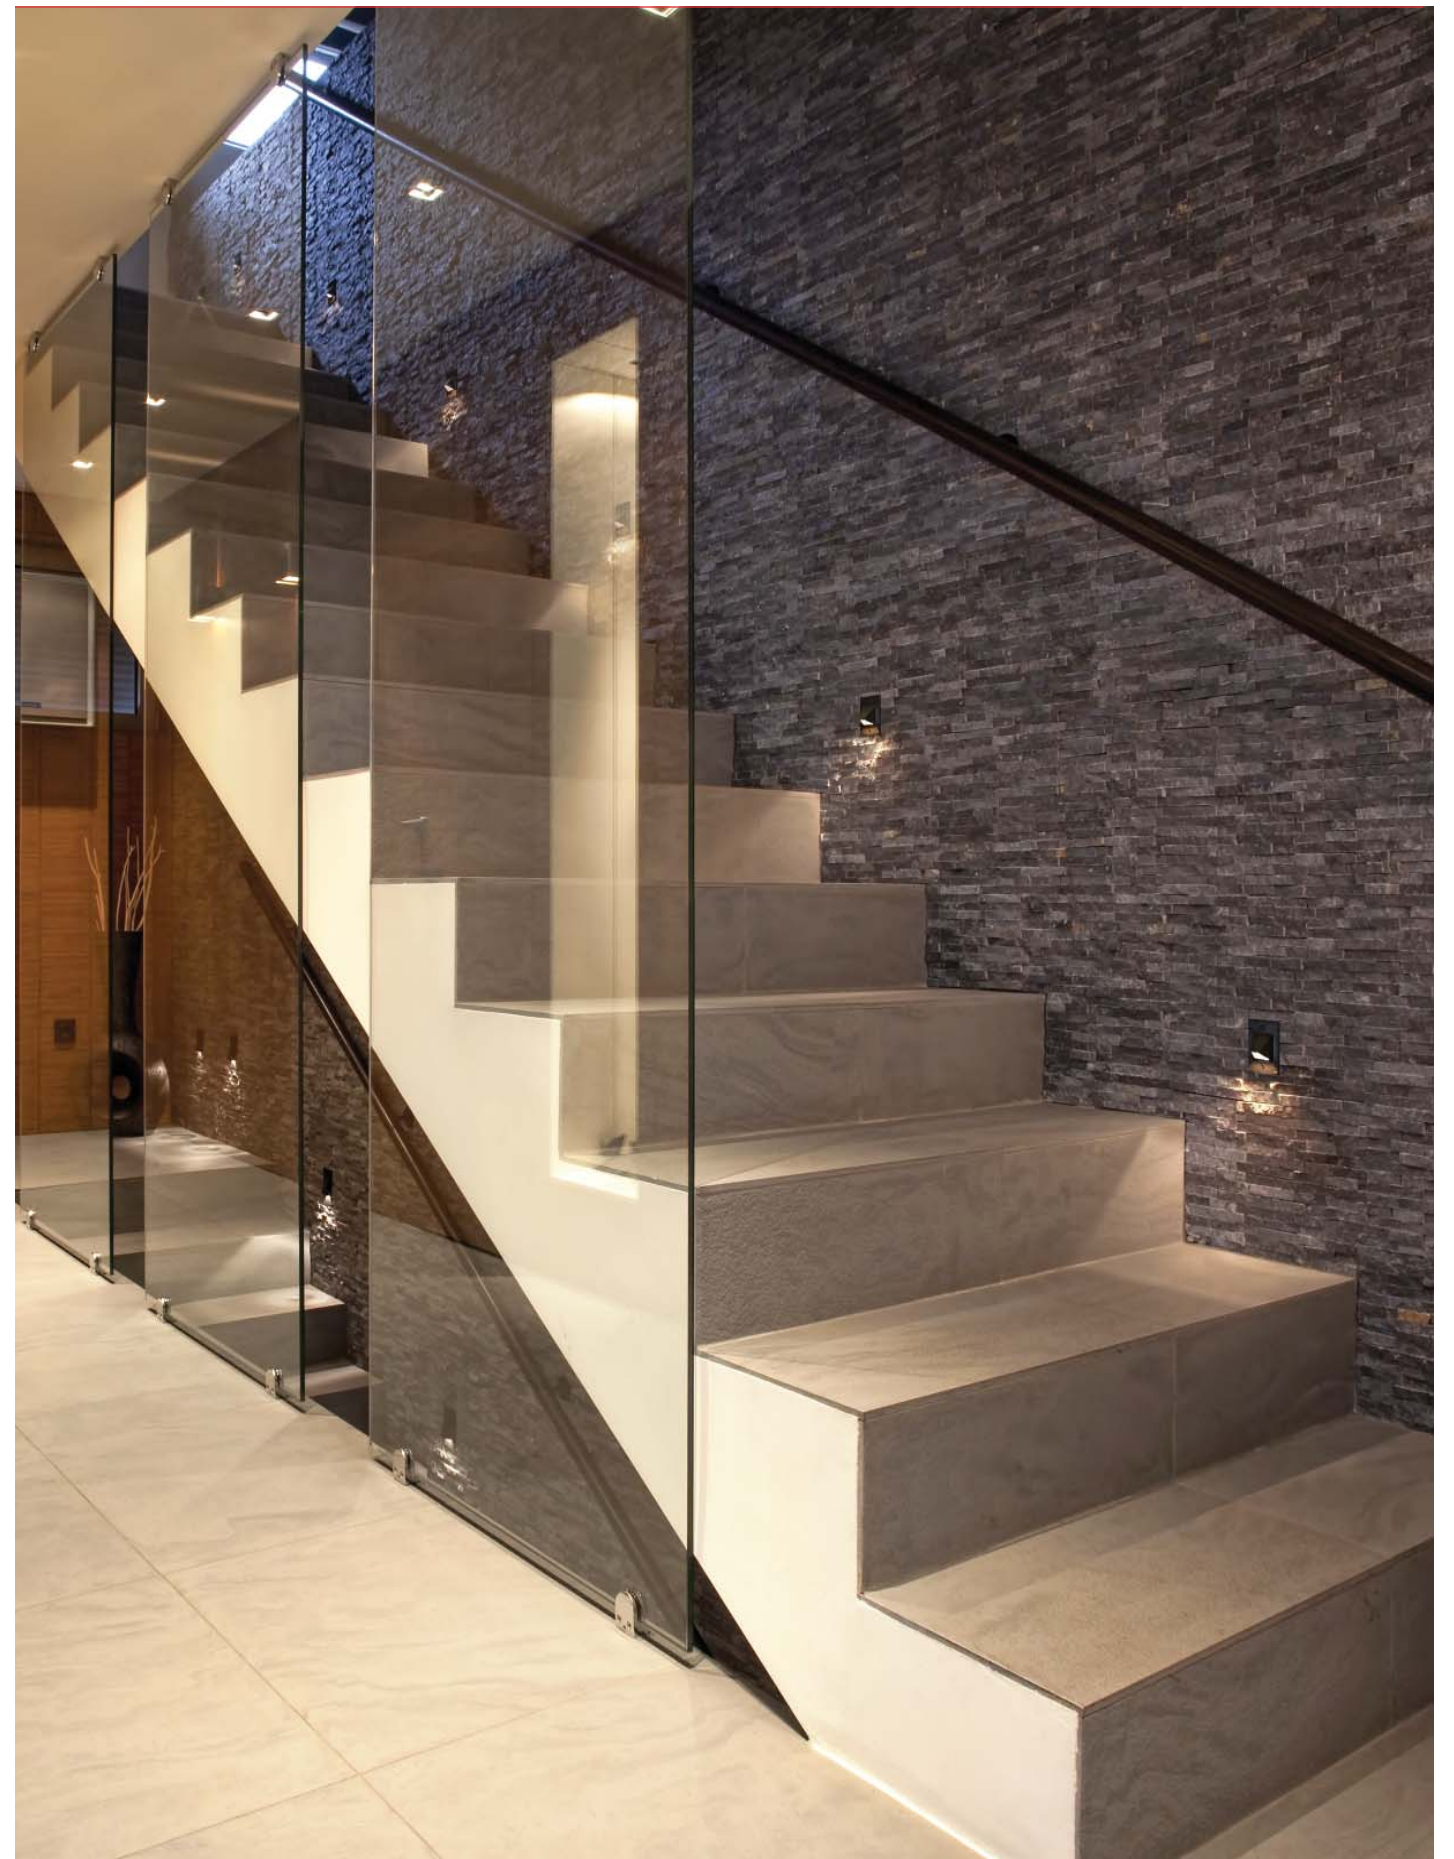



Lunar

6" Ø LED Steplights



SS3000-SM



SS3000-BZ



SS3000-WT

SS3000 Series

Fixture

- Integral 120V input driver
- 2 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 240 lm
- 6W total consumption
- Incandescent step dimming
- Diecast aluminum
- 6" Ø x 1½" p, ADA
- Solite Lens
- UL /C-UL Listed for wet location




Finishes


- **WT** White
- **SM** Silver Metallic
- **BZ** Bronze

Mounting

- Step- and wall-mount applications
- Fits in standard single-switch box, and 2" x 3" handy box



SS3000 Series

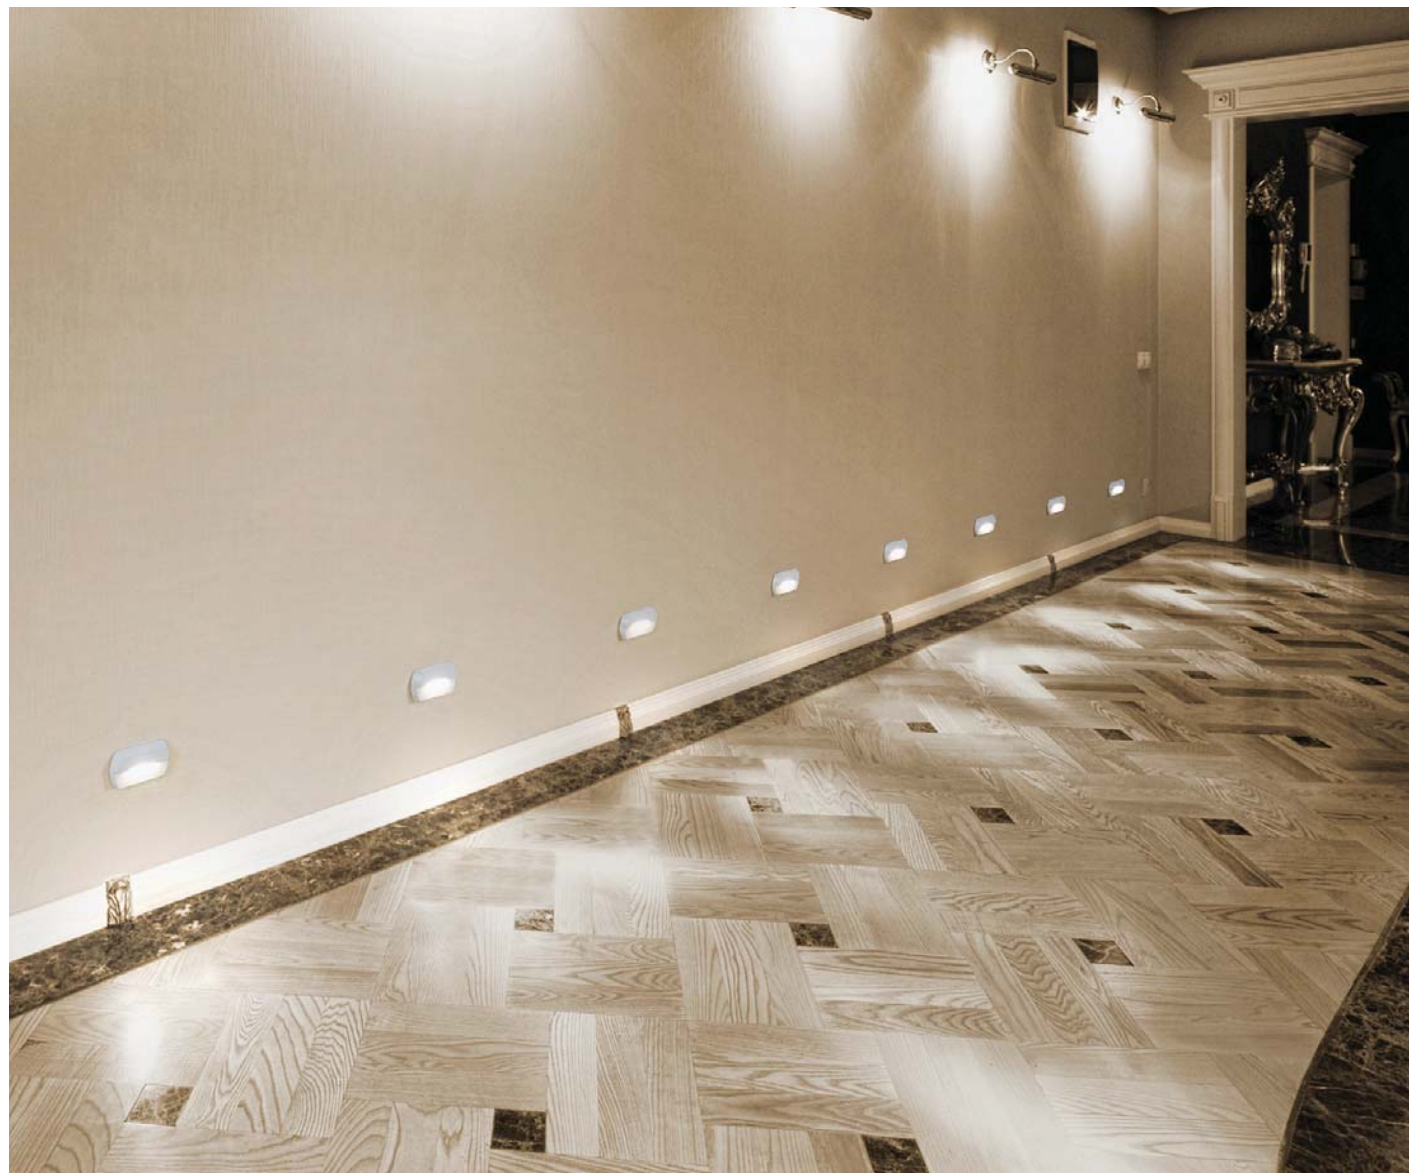

Notch

4³/₄"w LED Steplights



SS3004-WT



SS3004-BZ



SS3004-SM

SS3004 Series

Fixture

- Integral 120V input driver
- 1 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 120 lm
- 3W total consumption
- Incandescent step dimming
- Diecast aluminum
- 4³/₄" w x 2³/₄" h x ³/₄"p, ADA
- Solite Lens
- UL /C-UL Listed for wet location

Finishes

- WT White
- SM Silver Metallic
- BZ Bronze




Light Alternative

- AMB Amber

Mounting

- Step- and wall-mount applications
- Fits in standard single-switch box; also available in a 2" x 3" handy-box configuration; add -2x3 to end of part number



SS3004 Series

AMBER LIGHT OPTION



SS3004-AMB-BZ

- 590 nm



Arch

4½"w LED Steplights



SS3001-SM



SS3001-WT



SS3001-BZ

SS3001 Series

Fixture

- Integral 120V input driver
- 1 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 120 lm
- 3W total consumption
- Incandescent step dimming
- Diecast aluminum
- 4½" w x 3" h x 1½"p, ADA
- Solite Lens
- UL /C-UL Listed for wet location




Finishes


- **WT** White
- **SM** Silver Metallic
- **BZ** Bronze

Mounting

- Step- and wall-mount applications
- Fits in standard single-switch box, and 2" x 3" handy-box



SS3001 Series

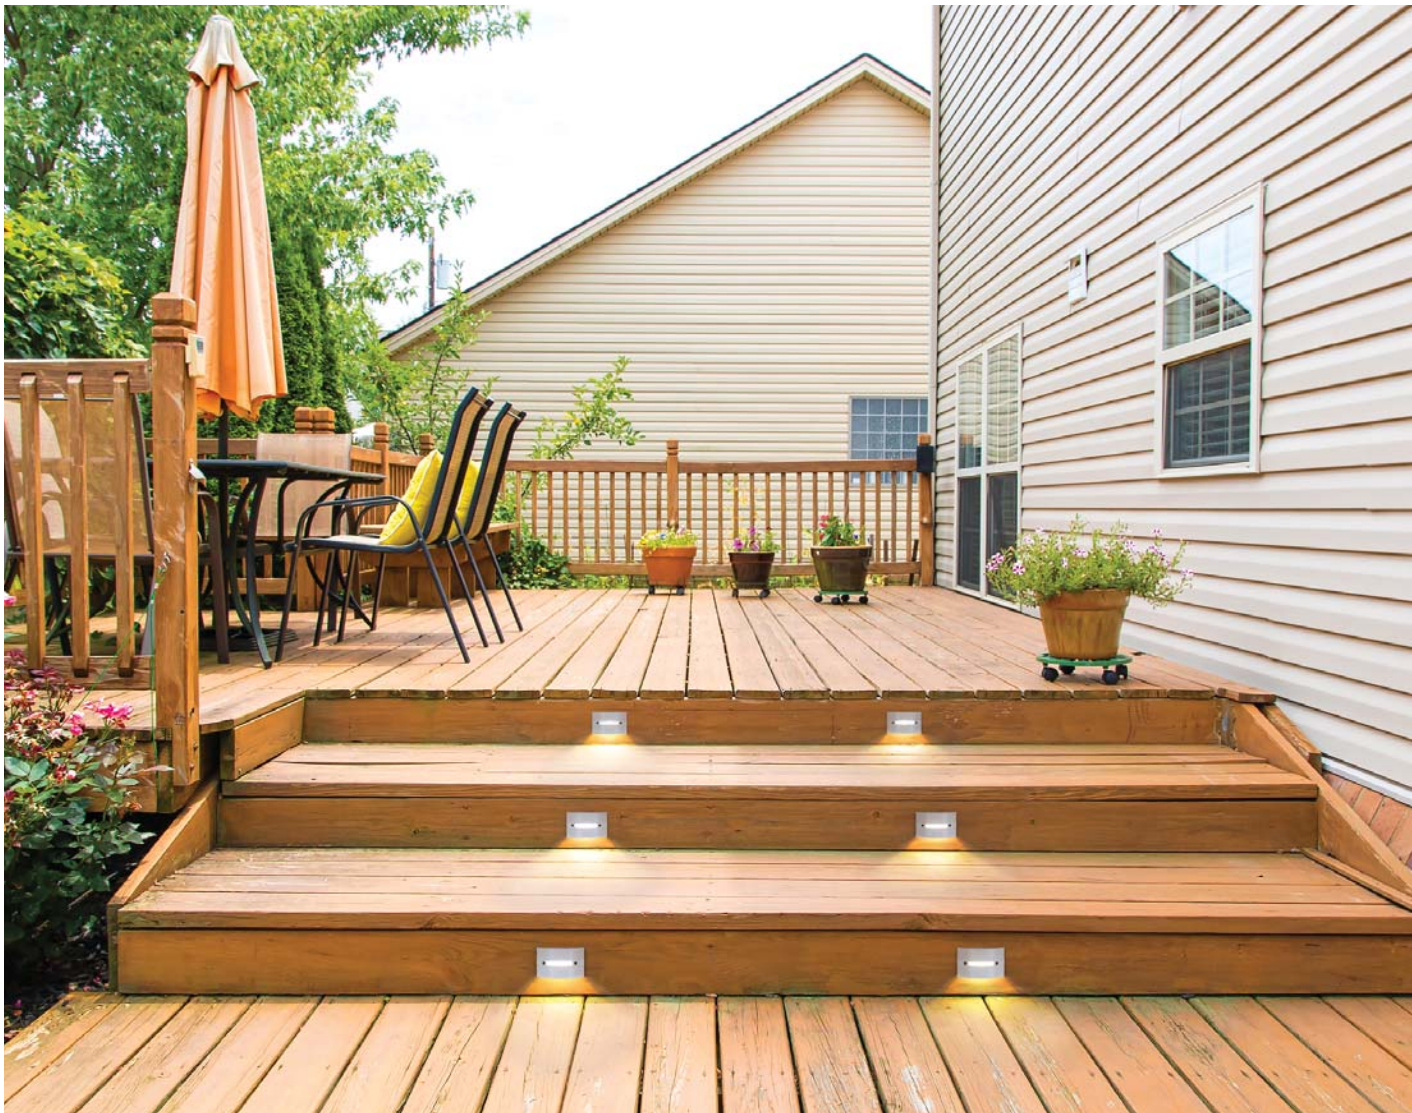

Groove

4½"w LED Steplights



SS3002-BZ



SS3002-WT



SS3002-SM

SS3002 Series

Fixture

- Integral 120V input driver
- 1 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 120 lm
- 3W total consumption
- Incandescent step dimming
- Diecast aluminum
- 4½" w x 3" h x 1½"p, ADA
- Solite Lens
- UL /C-UL Listed for wet location




Finishes

- **WT** White
- **SM** Silver Metallic
- **BZ** Bronze

Mounting

- Step- and wall-mount applications
- Fits in standard single-switch box, and 2" x 3" handy-box



SS3002 Series



Form

4 3/4" w LED Steplights



SS3005-WT



SS3005-BZ

SS3005 Series

Fixture

- Integral 120V input driver
- 1 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 120 lm
- 3W total consumption
- Incandescent step dimming
- Diecast aluminum
- 4 3/4" w x 2 3/4" h x 9/16" p, ADA
- Solite Lens
- UL /C-UL Listed for wet location



Finishes


- **WT** White
- **SM** Silver Metallic
- **BZ** Bronze

Light Alternative

- **AMB** Amber

Mounting

- Step- and wall-mount applications
- Fits in standard single-switch box; also available in a 2" x 3" handy-box configuration; add -2x3 to end of part number



SS3005 Series



SS3005-SM

AMBER LIGHT OPTION



SS3005-AMB-SM
• 590 nm



SS3006-BZ



SS3006-SM



SS3006-WT

SS3006 Series

Fixture

- Integral 120V input driver
- 1 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 120 lm
- 3W total consumption
- Incandescent step dimming
- Diecast aluminum
- 2¾" w x 4¾" h x 5⁄8"p, ADA
- Solite Lens
- UL /C-UL Listed for wet location

Finishes

- **WT** White
- **SM** Silver Metallic
- **BZ** Bronze

Light Alternative

- **AMB** Amber

Mounting

- Step- and wall-mount applications
- Fits in standard single-switch box; also available in a 2" x 3" handy-box configuration; add -2x3 to end of part number




Sleek-Full

2¾"w LED Steplights

AMBER LIGHT OPTION



SS3006-AMB-SM
• 590 nm



SS3006 Series



SS3007-SM



SS3007-BZ



SS3007-WT

SS3007 Series

Fixture

- Integral 120V input driver
- 1 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 120 lm
- 3W total consumption
- Incandescent step dimming
- Diecast aluminum
- 2¾" w x 4¾" h x 5⁄8"p, ADA
- Solite Lens
- UL /C-UL Listed for wet location



Finishes


- **WT** White
- **SM** Silver Metallic
- **BZ** Bronze

Light Alternative

- **AMB** Amber

Mounting

- Step- and wall-mount applications
- Fits in standard single-switch box; also available in a 2" x 3" handy-box configuration; add -2x3 to end of part number



SS3007 Series

Sleek-Half

2¾"w LED Steplights

AMBER LIGHT OPTION



SS3007-AMB-BZ
• 590 nm



Edge

3"w LED Steplights



SS3003-SM



SS3003-BZ

SS3003 Series

Fixture

- Integral 120V input driver
- 1 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 120 lm
- 3W total consumption
- Incandescent step dimming
- Diecast aluminum
- 3" w x 4½" h x 1½"p, ADA
- Solite Lens
- UL /C-UL Listed for wet location




Finishes

- **WT** White
- **SM** Silver Metallic
- **BZ** Bronze

Mounting

- Step- and wall-mount applications
- Fits in standard single-switch box, and 2" x 3" handy-box



SS3003 Series



SS3003-WT



SS3008-SM



SS3008-WT



SS3008-BZ

SS3008 Series

Fixture

- Integral 120V input driver
- 1 - 2.5W Cree XT-E LEDs, 700mA 2700°K ±50°K, 90 CRI, 120 lm
- 3W total consumption
- Incandescent step dimming
- Diecast aluminum
- 2¾" w x 4¾" h x ½"p, ADA
- Solite Lens
- UL /C-UL Listed for wet location




Finishes

- **WT** White
- **SM** Silver Metallic
- **BZ** Bronze

Mounting


- Step- and wall-mount applications
- Fits in standard single-switch box; also available in a 2" x 3" handy-box configuration; add -2x3 to end of part number



SS3008 Series

Channel

2¾"w LED Steplights

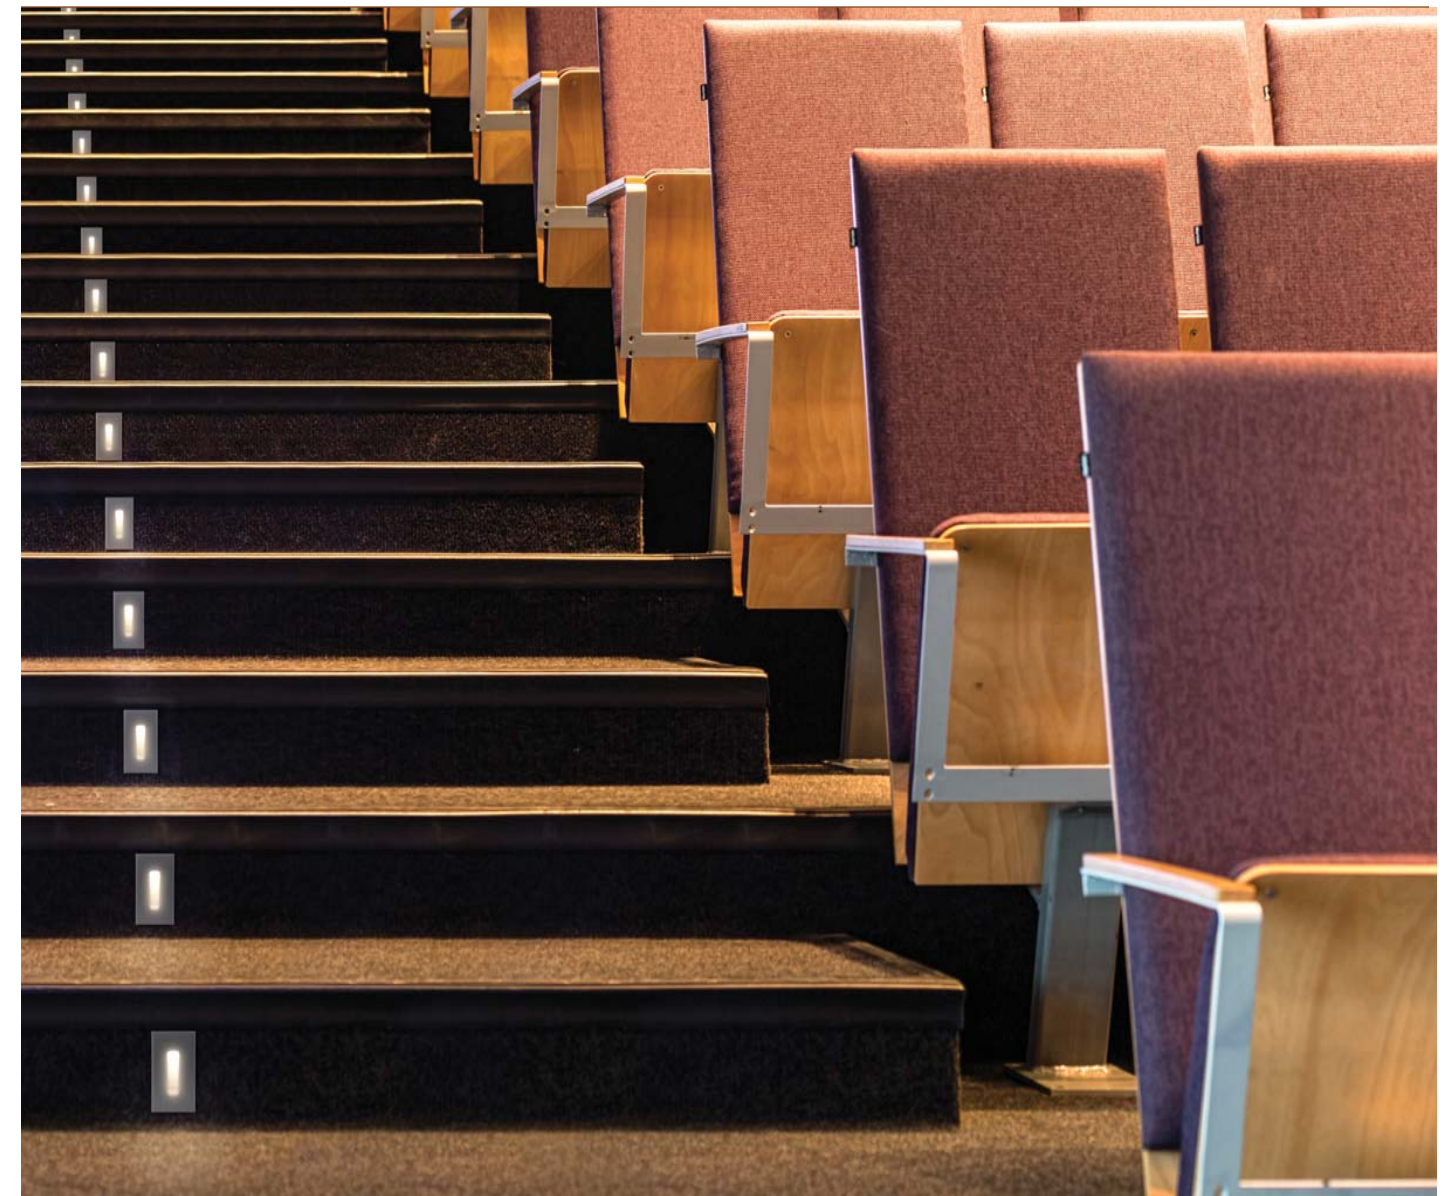

Ordering Example

SS3000 - AMB - WT

FIXTURE
NUMBER

AMBER
LIGHT
(Optional)

FINISH
CODE

Index

SS3000	3	SS3005	11
SS3001	7	SS3006	12
SS3002	9	SS3007	13
SS3003	15	SS3008	16
SS3004	5		

All CSL Steplight Fixtures:

- are UL and C-UL approved for wet locations





A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue
City of Industry CA 91744
Tel: 626.336.4511
Fax: 626.330.4266

www.csllighting.com

