

LED Cylinder Collection


Energy-Efficient Cylinder Lighting
June 2016





The new CSL Cylinder collection offers the best in functional yet decorative lighting. These luminaires integrate a dimmable, energy-efficient LED light source into slim silhouettes providing a range of mounting options and endless style. Include CSL's RGBW Lighting option and wash your rooms in the color of your choice, anytime you want it.

LED Adjustable Pendant	4
LED Flush Mount	10
LED Pendant	2
LED RGBW	12-15
LED Wall Mount	6
LED Wall Mount Up & Down	8
Finish Palette	17

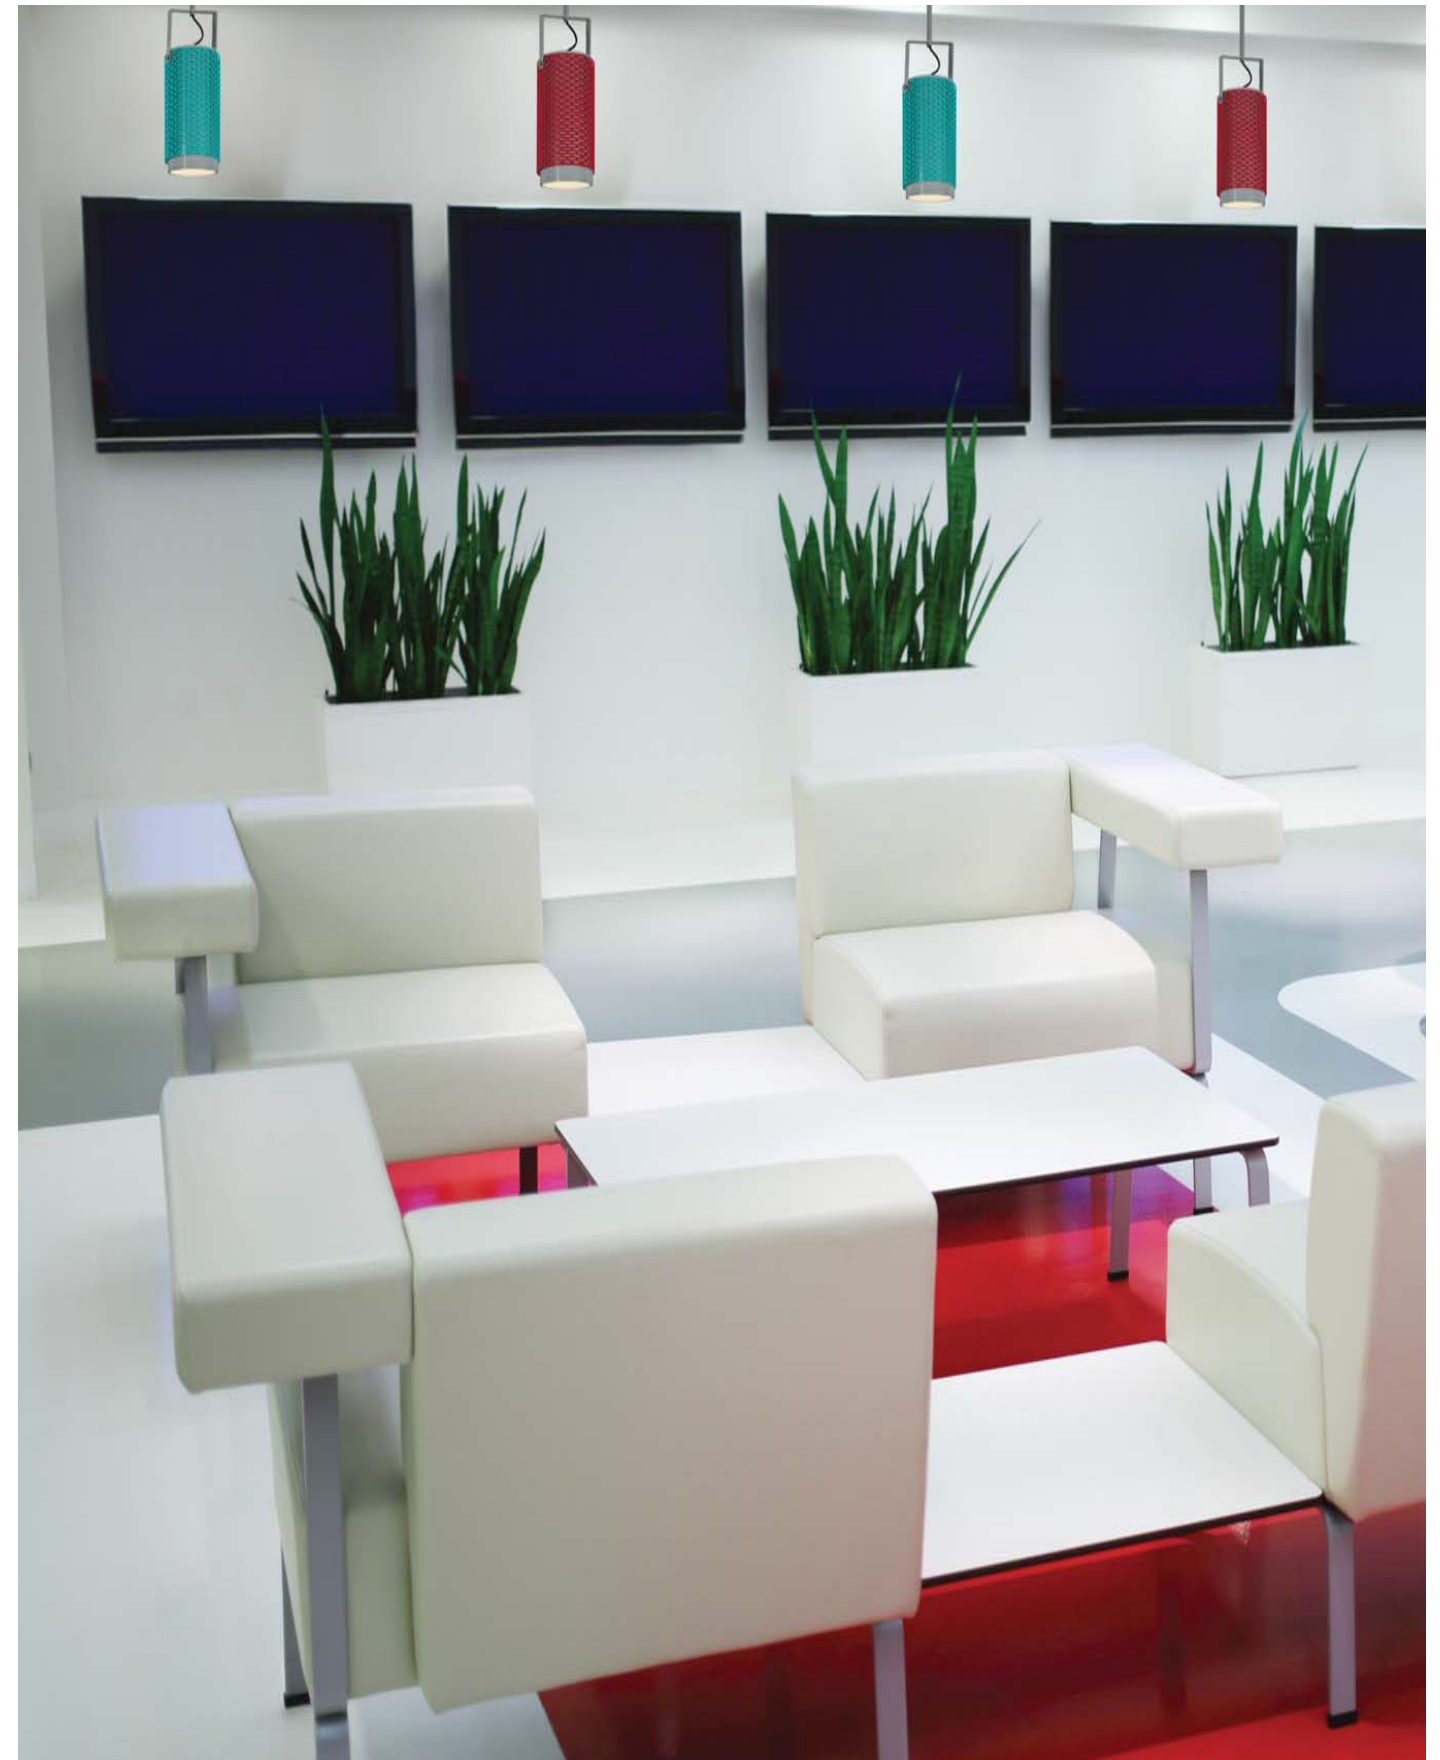



LED Pendant

LED Pendant

Fixture

- Available in three sizes:
LP2: 2¼" Ø x 6¾" h
LP3: 3½" Ø x 10¾" h
LP5: 5" Ø x 11½" h
- Available in two shapes:
Round: LP2, LP3, LP5
Square: SLP2, SLP3, SLP5
- 120-277V LED:
LP2 & SLP2 – 14W –
2,700°k ±50k, CRI 90, 980lm
3,000°k ±50k, CRI 90, 1074lm
3,500°k ±50k, CRI 90, 1157lm
4,000°k ±50k, CRI 80, 1250lm
LP3 & SLP3 – 24W –
2,700°k ±50k, CRI 90, 1900lm
3,000°k ±50k, CRI 90, 2035lm
3,500°k ±50k, CRI 90, 2186lm
4,000°k ±50k, CRI 80, 2691lm
LP5 & SLP5 – 38W –
2,700°k ±50k, CRI 90, 2815lm
3,000°k ±50k, CRI 90, 3012lm
3,500°k ±50k, CRI 90, 3012lm
4,000°k ±50k, CRI 80, 3700lm
- INC/ELV/0-10V Universal dimming. Lutron dimming options and EldoLED dimming options available. See dimming options and order example on pg 16.
- Canopy mount
2" & 3": Spun aluminum canopy
4½" x 1½"
5": Spun aluminum canopy 4½" x 2"
- To view pendants with RGBW, see page 13
- To order with RGBW, see page 15
- 30°, 50° and 80° optics included; 10° optional optic available
- UL/C-UL listed for wet location
- Includes 4 stems with hang-straight canopy: 1-6", 2-12" and 1-18"

Housing

- Machined aluminum housing

Finish

- See finishes on page 17



LP2-30-PNA-3



LP5-27-TBZ-1



SLP3-27-RD-4



Adjustable LED Pendant

Adjustable LED Pendant

Fixture

- Available in three sizes*:
 - LP2-ADJ – 2¼" Ø x 9¼" h
 - LP3-ADJ – 3½" Ø x 13¾" h
 - LP5-ADJ – 5" Ø x 14¾" h
- Adjustable to 90° horizontally
- 120-277V LED:
 - LP2-ADJ – 14W –
 - 2,700°k ±50k, CRI 90, 980lm
 - 3,000°k ±50k, CRI 90, 1074lm
 - 3,500°k ±50k, CRI 90, 1157lm
 - 4,000°k ±50k, CRI 80, 1250lm
 - LP3-ADJ – 24W –
 - 2,700°k ±50k, CRI 90, 1900lm
 - 3,000°k ±50k, CRI 90, 2035lm
 - 3,500°k ±50k, CRI 90, 2186lm
 - 4,000°k ±50k, CRI 80, 2691lm
 - LP5-ADJ – 38W –
 - 2,700°k ±50k, CRI 90, 2815lm
 - 3,000°k ±50k, CRI 90, 3012lm
 - 3,500°k ±50k, CRI 90, 3012lm
 - 4,000°k ±50k, CRI 80, 3700lm
- INC/ELV/0-10V Universal dimming. Lutron dimming options and EldoLED dimming options available. See dimming options and order example on pg 16.
- Canopy mount
- 30°, 50° and 80° optics included; 10° optional optic available
- UL/C-UL listed for wet location

Housing

- Machined aluminum housing
- Choose two finish colors. First color is cylinder/bracket and second color is perforated shield

Finish

- See finishes on page 17.

*Adjustable Pendants available in round only



LP3-ADJ-27-FLG-LG-4



LP3-ADJ-27-FLG-BLU-4



LW5-27-TBZ-1



SLW3-40-BLU-4

LED Wall Mount

Fixture

- Available in three sizes:
LW2 – 2¼" Ø x 6¾" h x 4" p ADA
LW3 – 3½" Ø x 10¾" h x 5¼" p
LW5 – 5" Ø x 11½" h x 6¾" p
- Available in two shapes:
Round: LW2, LW3, LW5
Square: SLW2, SLW3, SLW5
- 120-277V LED:
LW2 & SLW2 – 14W –
2,700°k ±50k, CRI 90, 980lm
3,000°k ±50k, CRI 90, 1074lm
3,500°k ±50k, CRI 90, 1157lm
4,000°k ±50k, CRI 80, 1250lm
LW3 & SLW3 – 24W –
2,700°k ±50k, CRI 90, 1900lm
3,000°k ±50k, CRI 90, 2035lm
3,500°k ±50k, CRI 90, 2186lm
4,000°k ±50k, CRI 80, 2691lm
LW5 & SLW5 – 38W –
2,700°k ±50k, CRI 90, 2815lm
3,000°k ±50k, CRI 90, 3012lm
3,500°k ±50k, CRI 90, 3012lm
4,000°k ±50k, CRI 80, 3700lm
- INC/ELV/0-10V Universal dimming. Lutron dimming options and EldoLED dimming options available. See dimming options and order example on pg 16.
- Wall mount
- To view Wall mounts with RGBW, see page 14
- To order with RGBW, see page 15
- 30°, 50° and 80° optics included; 10° optional optic available
- UL/C-UL listed for wet location

Housing

- Machined aluminum housing

Finish

- See finishes on page 17.



LED Wall Mount



LED Wall Mount Up & Down

LED Wall Mount Up & Down

Fixture

- Fixture illuminates from top and bottom of cylinder
- Available in three sizes:
LWD2 – 2¼" Ø x 6¾" h x 4" p ADA
LWD3 – 3½" Ø x 10¾" h x 5¼" p
LWD5 – 5" Ø x 11½" h x 6¾" p
- Available in two shapes:
Round: LWD2, LWD3, LWD5
Square: SLWD2, SLWD3, SLWD5
- 120-277V LED:
LWD2 & SLWD2 – 14W –
2,700°k ±50k, CRI 90, 980lm
3,000°k ±50k, CRI 90, 1074lm
3,500°k ±50k, CRI 90, 1157lm
4,000°k ±50k, CRI 80, 1250lm
LWD3 & SLWD3 – 24W –
2,700°k ±50k, CRI 90, 1900lm
3,000°k ±50k, CRI 90, 2035lm
3,500°k ±50k, CRI 90, 2186lm
4,000°k ±50k, CRI 80, 2691lm
LWD5 & SLWD5 – 38W –
2,700°k ±50k, CRI 90, 2815lm
3,000°k ±50k, CRI 90, 3012lm
3,500°k ±50k, CRI 90, 3012lm
4,000°k ±50k, CRI 80, 3700lm
- INC/ELV/0-10V Universal dimming. Lutron dimming options and EdoLED dimming options available. See dimming options and order example on pg 15.
- Wall mount
- To view Wall mounts with RGBW, see page 16
- To order with RGBW, see page 17
- 30°, 50° and 80° optics included; 10° optional optic available
- UL/C-UL listed for wet location

Housing

- Machined aluminum housing

Finish

- See finishes on page 17.



SLWD3-27-BK-4



LWD2-40-GA-3



Fixture illuminates from top and bottom of cylinder



LF5-27-BB-1



LF2-27-PNC-3



SLF3-40-WT-4

LED Flush Mount

Fixture

- Available in three sizes:
LF2 – 2¼" Ø x 8¾" h
LF3 – 3½" Ø x 10¾" h
LF5 – 5" Ø x 13½" h
- Available in two shapes:
Round: LF2, LF3, LF5
Square: SLF2, SLF3, SLF5
- 120-277V LED:
LF2 & SLF2 – 14W –
2,700°k ±50k, CRI 90, 980lm
3,000°k ±50k, CRI 90, 1074lm
3,500°k ±50k, CRI 90, 1157lm
4,000°k ±50k, CRI 80, 1250lm
LF3 & SLF3 – 24W –
2,700°k ±50k, CRI 90, 1900lm
3,000°k ±50k, CRI 90, 2035lm
3,500°k ±50k, CRI 90, 2186lm
4,000°k ±50k, CRI 80, 2691lm
LF5 & SLF5 – 38W –
2,700°k ±50k, CRI 90, 2815lm
3,000°k ±50k, CRI 90, 3012lm
3,500°k ±50k, CRI 90, 3012lm
4,000°k ±50k, CRI 80, 3700lm
- INC/ELV/0-10V Universal dimming. Lutron dimming options and EldoLED dimming options available. See dimming options and order example on pg 16
- Flush mount
- To view Flush mounts with RGBW, see page 15
- To order with RGBW, see page 15
- 30°, 50° and 80° optics included; 10° optional optic available
- UL/C-UL listed for wet location

Housing

- Machined aluminum housing

Finish

- See finishes on page 17.



LED Flush Mount



RGBW Lighting

Any color. Any time.

- The RGBW LED engine by CSL can create the light color of your choice - from saturated blue, violet, green yellow, orange, and red, to a wide variety of architectural white. Your CSL RGBW LED light can mix any color, any time.
- RGBW option is available in LED Pendant, Wall mount and Flush mount cylinders
- Color changes are digitally controlled through the DMX interface of your choice

LED RGBW - PENDANTS

Fixture

- Available in three sizes: 2", 3" and 5"
- Available in two shapes: Round and Square*
- Integral EldoLED DMX 120-277V input LED driver
- DMX512 controller must be purchased separately
- Canopy mount: 6.5" dia.
- 50° and 80° optics included
- UL/C-UL listed for wet location

Housing


- Machined aluminum housing

Finish

- See finishes on page 17.

Pendant:

- 2" Round LP2-RGBW-XX-3 14W, 560lm
- 2" Square SLP2-RGBW-XX-3 14W, 560lm
- 3" Round LP3-RGBW-XX-4 24W, 960lm
- 3" Square SLP3-RGBW-XX-4 24W, 960lm
- 5" Round LP5-RGBW-XX-1 38W, 1520lm
- 5" Square SLP5-RGBW-XX-1 38W, 1520lm

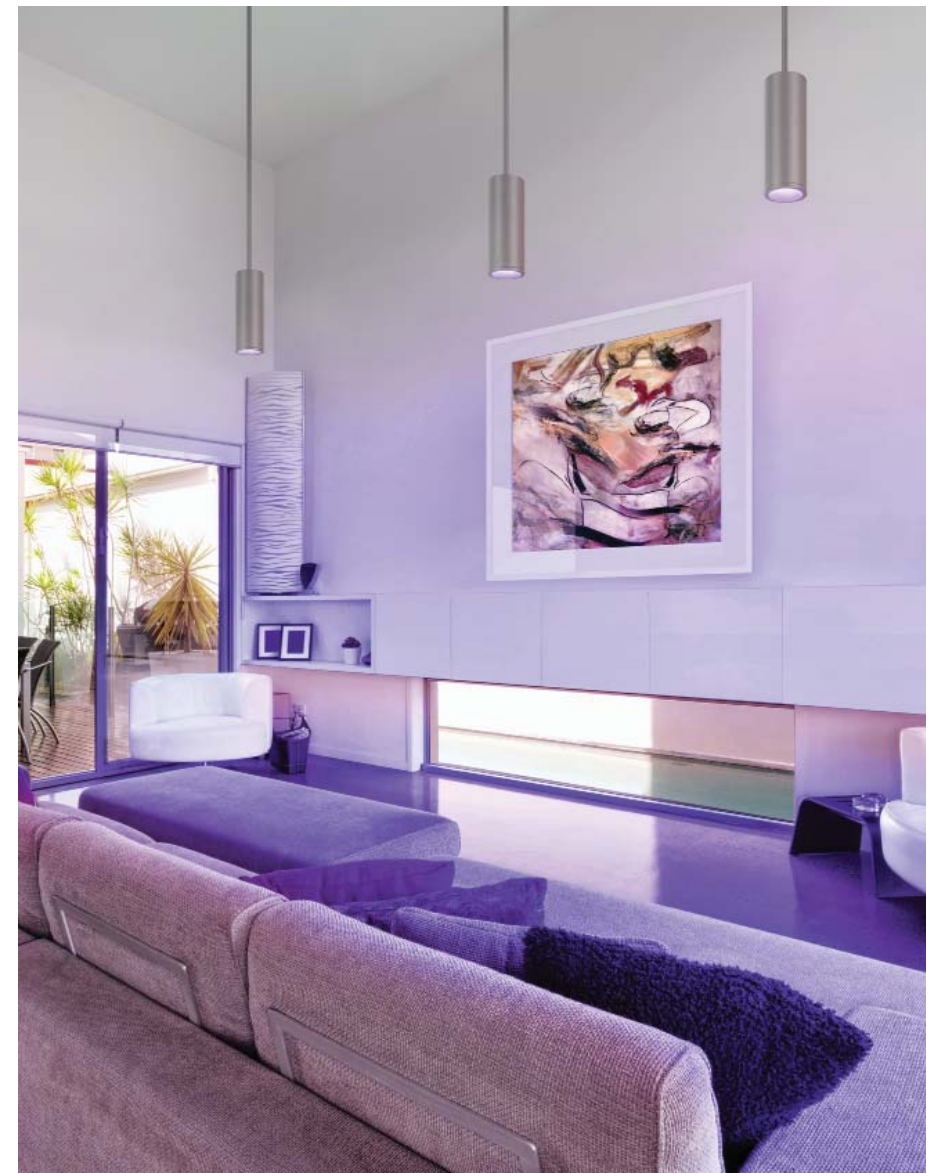

LED RGBW - WALL MOUNTS

Fixture

- Available in three sizes: 2", 3" and 5"
- Available in two shapes: Round and Square
- Integral EldoLED DMX 120-277V input LED driver
- DMX512 controller must be purchased separately
- Wall mount
- 50° and 80° optics included
- UL/C-UL listed for wet location

Housing

- Machined aluminum housing

Finish

- See finishes on page 17.

Wall Mount:

- 2" Round LW2-RGBW-XX-3 14W, 560lm
- 2" Square SLW2-RGBW-XX-3 14W, 560lm
- 3" Round LW3-RGBW-XX-4 24W, 960lm
- 3" Square SLW3-RGBW-XX-4 24W, 960lm
- 5" Round LW5-RGBW-XX-1 38W, 1520lm
- 5" Square SLW5-RGBW-XX-1 38W, 1520lm

Up & Down Wall Mount:

- 2" Round LWD2-RGBW-XX-3 14W, 560lm
- 2" Square SLWD2-RGBW-XX-3 14W, 560lm
- 3" Round LWD3-RGBW-XX-4 24W, 960lm
- 3" Square SLWD3-RGBW-XX-4 24W, 960lm
- 5" Round LWD5-RGBW-XX-1 38W, 1520lm
- 5" Square SLWD5-RGBW-XX-1 38W, 1520lm



LED RGBW - FLUSH MOUNTS

Fixture

- Available in three sizes: 2", 3" and 5"
- Available in two shapes: Round and Square
- Integral EldoLED DMX 120-277V input LED driver
- DMX512 controller must be purchased separately
- Flush mount
- 50° and 80° optics included
- UL/C-UL listed for wet location

Housing

- Machined aluminum housing

Finish

- See finishes on page 17.

Flush Mount:

- 2" Round LF2-RGBW-XX-3 14W, 560lm
- 2" Square SLF2-RGBW-XX-3 14W, 560lm
- 3" Round LF3-RGBW-XX-4 24W, 960lm
- 3" Square SLF3-RGBW-XX-4 24W, 960lm
- 5" Round LF5-RGBW-XX-1 38W, 1520lm
- 5" Square SLF5-RGBW-XX-1 38W, 1520lm



Ordering Example - RGBW

LP2	-	RGBW	-	MB	-	3
LP3	-	RGBW	-	WT	-	4
LP5	-	RGBW	-	BB	-	1
FIXTURE NUMBER		LIGHT COLOR		FINISH CODE		VERSION NUMBER
				See P. 17		



Ordering Example

LP2 – **27** – **MB** – **3** – **DIM**
LP3 – **30** – **WT** – **4** – **DIM**
LP5 – **40** – **BB** – **1** – **DIM**

FIXTURE NUMBER	LIGHT COLOR	FINISH CODE	VERSION NUMBER	DIMMING OPTIONS
	27 – 2700°K	See p. 17		BLANK – Standard Dimming
	30 – 3000°K			L1* – Lutron A Series Hi-Lume 2-Wire
	35 – 3500°K			LR1* – Lutron A Series Hi-Lume 2-Wire Remote
	40 – 4000°K			L2* – Lutron Eco-System 5 Series
				L3* – Lutron Hi-Lume H Series Fade-to-Black
				L4* – Lutron A Series Hi-Lume 3-Wire
				EL1* – EldoLED DALI
				EL2* – EldoLED 0-10V
				EL3** – DMX

All CSL Cylinder Fixtures:

- are UL and C-UL approved for wet locations
- offer multiple dimming options
- are offered with Coastal Finish option, see page 17



Index

LF2	10	LW2	6
LF3	10	LW3	6
LF5	10	LW5	6
LP2	3	LWD2	9
LP3	3	LWD3	9
LP5	3	LWD5	9
LP2-ADJ	5	RGBW	12-15
LP3-ADJ	5	SLF	10
LP5-ADJ	5	SLP	3
		SLW	6
		SLWD	9

* Select Lutron/EldoLED dimming options require a 6" canopy or backplate.

**EL3 requires a 6.5" canopy. Contact your CSL rep or the factory for details

Finishes

Standard and Specialty Finishes can be specified for all fixtures, unless otherwise noted.

Standard Finishes



ABL Aegean Blue



BLU Blue




TTL Tahitian Teal



LG Lime Green




HG Hunter Green



TNG Tangerine



RD Red



BK Gloss Black



MB Matte Black




GWT Gloss White



WT Semi-Gloss White




DVG Dove Gray



FLG Flannel Gray



PNA Painted Natural Aluminum




SS Satin Silver



TGP Textured Graphite




PNC Painted Natural Copper



BZP Bronze Patina



TBZ Textured Bronze



BB Burnished Bronze

Specialty Finish



GA Galvanized

Coastal Finish Option

The Coastal Finish is a coating which protects finishes on fixtures installed in coastal climates. To specify, add "-C" to end of order number.



A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue
City of Industry CA 91744
Tel: 626.336.4511
Fax: 626.330.4266

www.csllighting.com

