

Architectural Lighting

Contemporary Illumination
June 2016






CSL Lighting is renowned for innovation in Architectural Lighting design and technology and continues to create unique, intriguing luminaires. Our latest generation of Architectural Lighting fixtures, engineered and manufactured to the highest standards, offers lighting options defined by a dynamic blend of light and shape.

Our new line of luminaires features energy-saving LEDs and an array of finishes to complement any environment. All fixtures are UL approved for wet or damp locations.

Aura	28
Compass	11
Contour	22
Cube	5
Cube Linear	5
Echo	18
Entity	9
Glow	25
Glow Linear	27
Gravity	2
Hex	12
Omni	6
Radiator	20
Veil	16
Waymark	30
Wing Semi-Flush	14
Wing Wall	15
Finish Palette	32

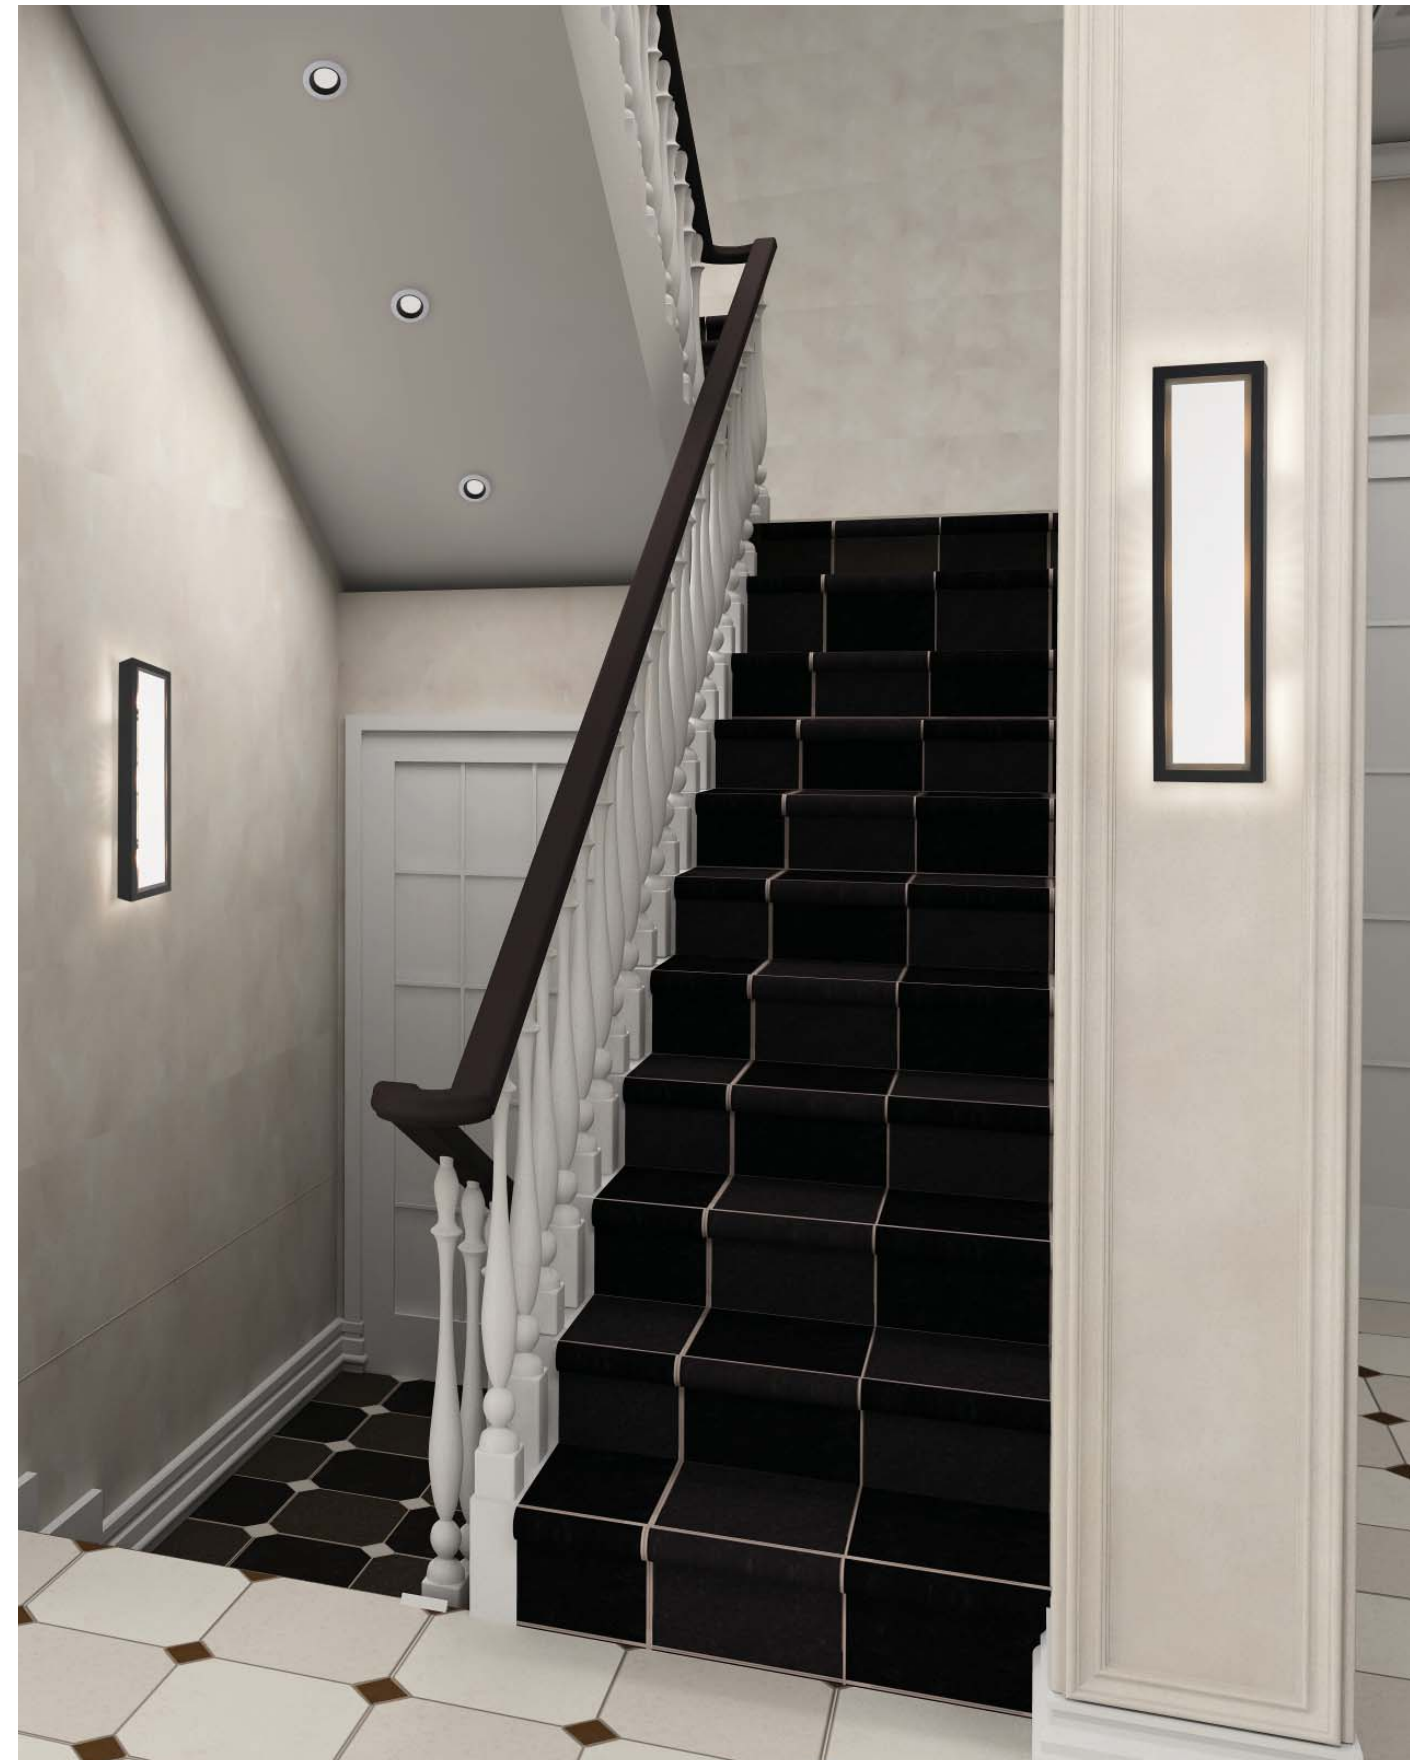



SS1012-27-SA



SS1012-27-BZ



SS1012-RD-SA



SS1012-AMB-SA



SS1012-GR-SA



SS1012-BL-SA



SS1012-BKL-SA

SS1012

Fixture

- 4 $\frac{3}{4}$ " \varnothing x 4" p
- ADA
- 120V 9W LED, 630 lm
- 27-White – 2700°K \pm 50°, 90 CRI
- RD-Red – 625 nm
- AMB-Amber – 590 nm
- BL-Blue – 470 nm
- GR-Green – 530 nm
- BKL-Blacklight – 350 nm
- Incandescent dimmable
- Wall and flush mount
- UL/C-UL listed for wet location

Housing

- Diecast aluminum housing
- Opal glass inner diffuser with clear glass outer cylinder

Finish

- Satin Aluminum, Bronze
- First color: LED color
- Second color: Housing finish
- See finishes on page 32



Gravity

A compact wall- or flush-mounted fixture with diffused, even illumination in a variety of decorative colors



Cube

A solid, geometric fixture emitting symmetrical direct illumination vertically from the cube form and horizontally from the linear version



SS2001-GA

Cube

SS2001

Fixture

- 6" w x 6" h x 6" p
- 120V 18W LED, 840 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for wet location

Housing

- Extruded aluminum housing

Finish

- See finishes on page 32



SS2001A-TBZ

Linear Cube

SS2001A

Fixture

- 6" w x 12" h x 6" p
- 120V 36W LED, 1680 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for wet location

Housing

- Extruded aluminum housing

Finish


- See finishes on page 32



SS4015B-SS



SS4015C-TBZ

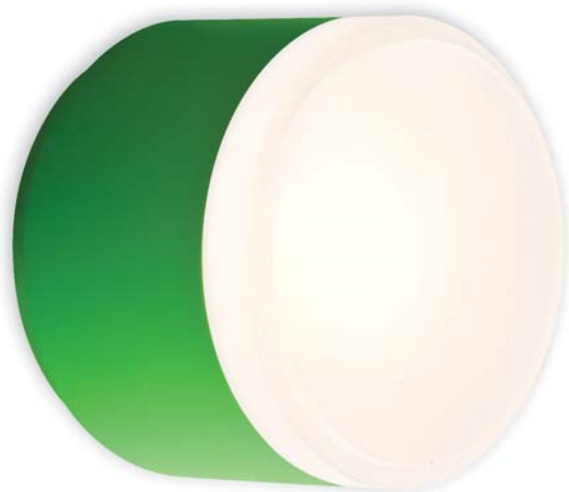

SS4015A-LG

Diffuser Options:

Concave
Diffuser (A)



Stepped
Diffuser (B)



Inner Stepped
Diffuser (C)



Flat
Diffuser (D)



SS4015

Fixture

- 5" Ø x 4¼" p
- 120V 18W LED, 840 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall and flush mount
- UL/C-UL listed for damp location

Housing

- Machined aluminum housing
- Machined acrylic diffuser
- Four machined acrylic diffuser options:
A – Concave
B – Stepped
C – Inner Stepped
D – Flat

Finish

- See finishes on page 32



Omni

A bold, decorative light source, wall- or flush-mounted singly or in multiples for even, ambient illumination



Entity

A decorative, directional light that combines stylish design with a dimmable, energy efficient light source



SS4021-27-DVG



SS4021-30-BLU

SS4021

Fixture

- 5¾" x 5"
- 120-277V 24W LED,
- SS4021-27-XX LED, 2,700°k ±50k, CRI 90, 1900lm
- SS4021-30-XX LED, 3,000°k ±50k, CRI 90, 2035lm
- SS4021-35-XX LED, 3,500°k ±50k, CRI 90, 2186lm
- SS4021-40-XX LED, 4,000°k ±50k, CRI 80, 2691lm
- Universal Dimming (Triac, ELV and 0-10v)
- Wall and flush mount
- UL/C-UL listed for damp location

Housing

- Machined aluminum housing
- Solite glass lens

Finish

- See finishes on page 32



SS3028C-SA

Compass

A solid, dramatic fixture with optical-glass lenses casting illumination in multiple directions

SS3028C

Fixture

- 4½" Ø x 4" p
- ADA
- 120V 9W LED, 630 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall and flush mount
- UL/C-UL listed for wet location

Housing

- Diecast and extruded aluminum housing
- Optical glass lens

Finish

- Satin Aluminum



Hex

A smart, geometric fixture featuring warm, diffused illumination encased in a multi-colored hexagonal shape; available in two sizes

SS2000 Series

SS2000

Fixture

- 14" w x 14" h x 3½" p
- ADA
- 120V 18W LED, 1260 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall and flush mount
- UL/C-UL listed for damp location

SS2000A

Fixture

- 8" w x 8" h x 3½" p
- ADA
- 120V 12W LED, 840 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall and flush mount
- UL/C-UL listed for damp location

Housing

- Stamped aluminum housing
- Molded acrylic lens/diffuser

Finish

- See finishes on page 32
- Specify two finish colors: Outer housing color first, then inner accent color



SS2000-TBZ-TNG



SS2000A-WT-LG



SS2000A-TGP-TTL




SS2000A-WT-TNG



Wing Semi-Flush

A contemporary linear island light providing uniform indirect illumination

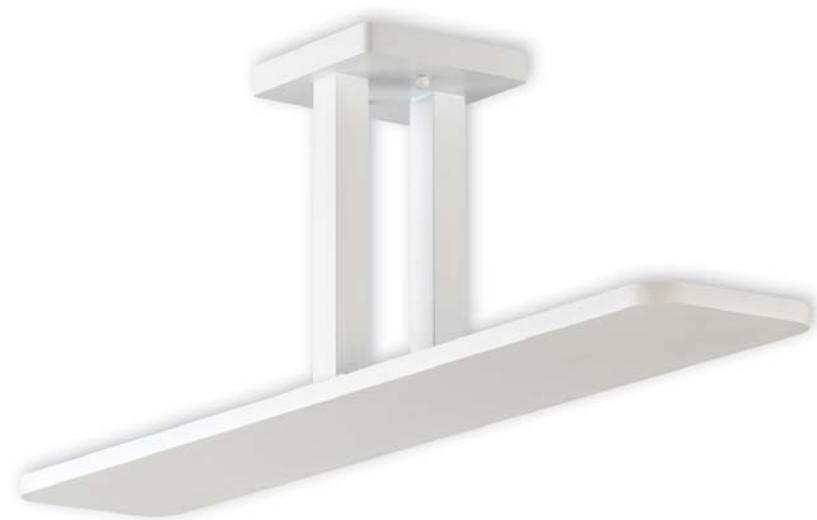

SS4017-WT

SS4017

Fixture

- 5" w x 27½" l x 9¼" h
- 120V 48W LED, 3360 lm
2700°K ±50° 90 CRI
- Incandescent dimming
- Flush mount
- UL/C-UL listed for damp location

Housing

- Architectural aluminum

Finish

- See finishes on page 32



SS4019

Fixture

- 16" w x 5½" h x 7" p
- 120V 24W LED, 1680 lm
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

Housing

- Architectural aluminum

Finish


- See finishes on page 32

Wing Wall

A bold, modern wall-mounted 45° plane with wall-grazing, indirect illumination



SS4019-LG

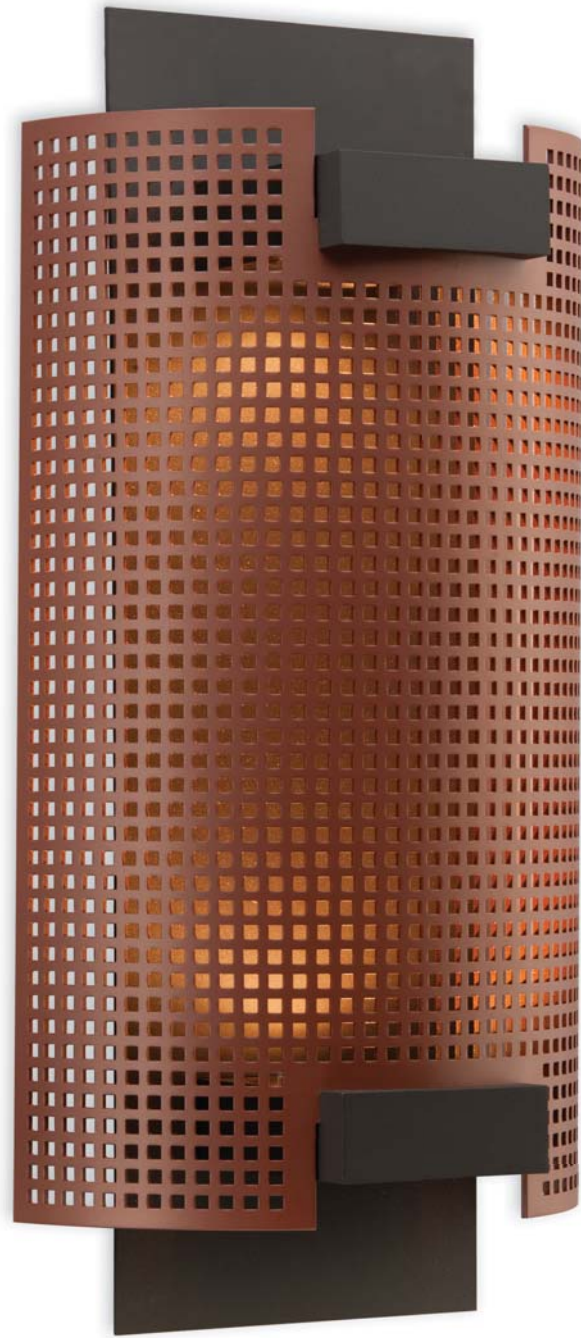

SS4001-TBZ-PNC

SS4001

Fixture


- 12" w x 24" h x 7" p
- 120V 36W LED, 2520 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for wet location

Housing

- Machined aluminum housing
- Pierced aluminum shield

Finish

- See finishes on page 32
- Specify two finish colors: Outer housing color first, then pierced shield color

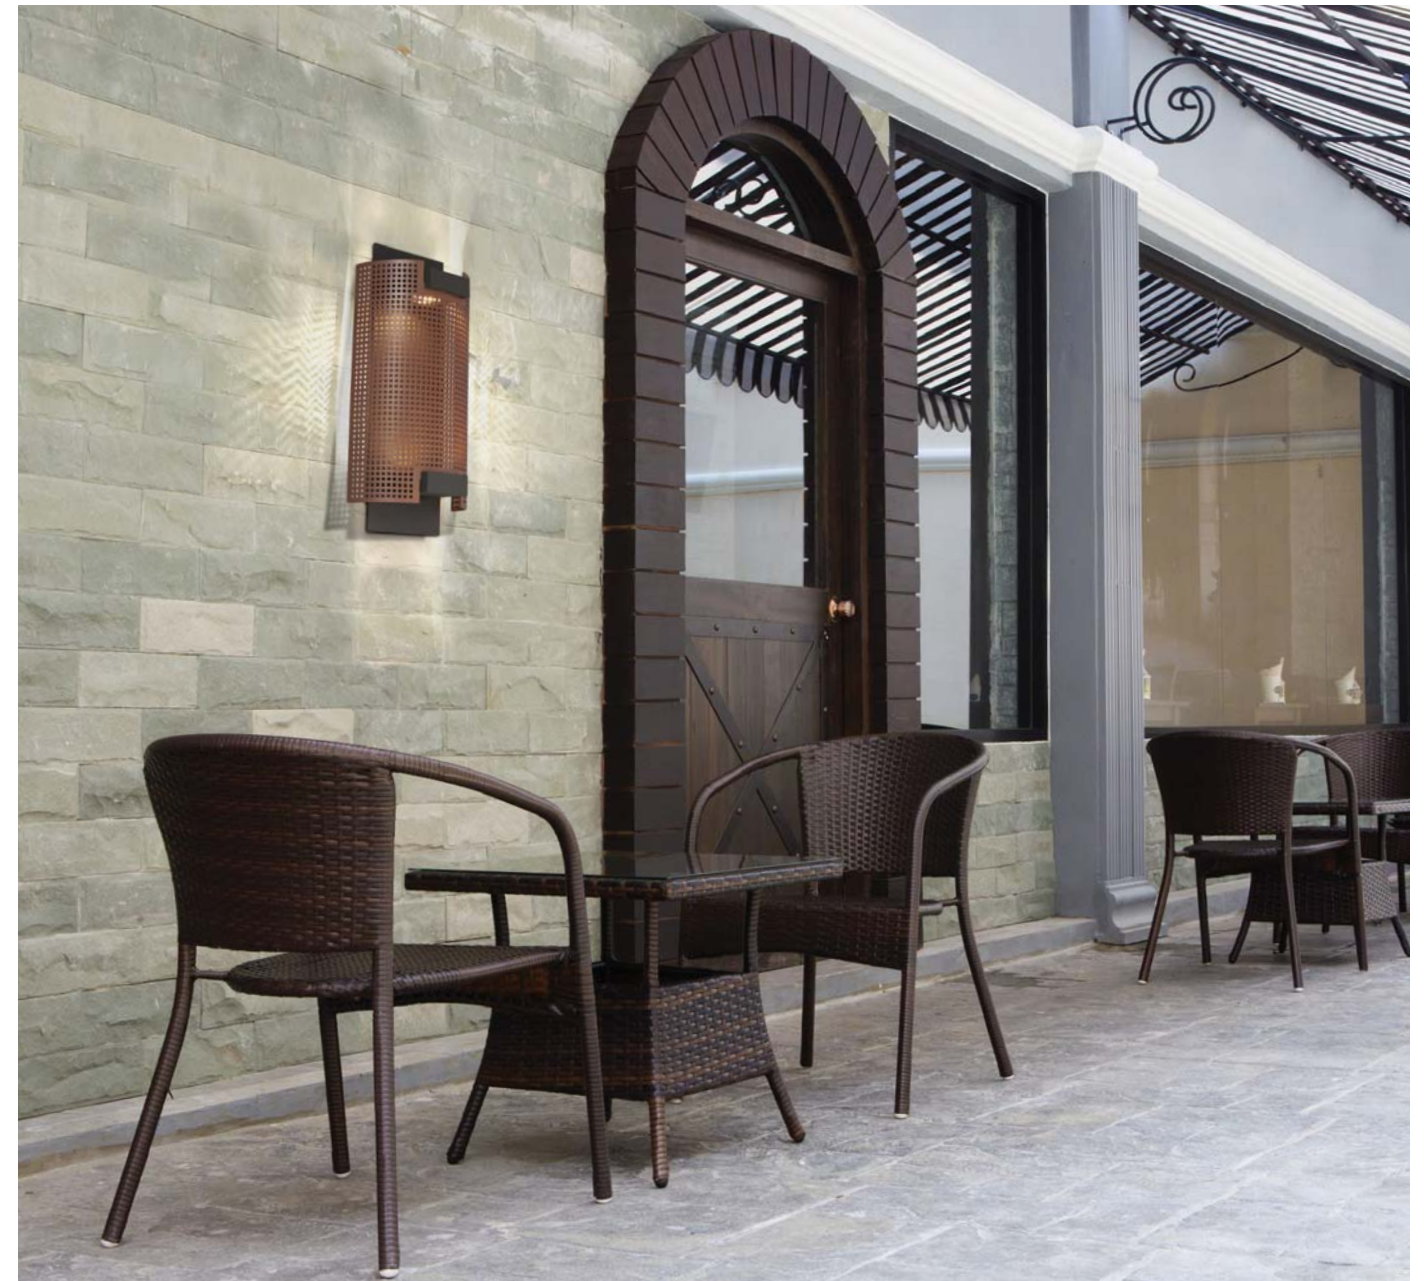

Veil

A substantial, wall-mounted, indoor/outdoor fixture featuring a pierced aluminum diffuser which distributes a distinctive light pattern



SS4003-TBZ

SS4003

Fixture

- 9" w x 7" h x 3½" p
- ADA
- 120V 18W LED, 1260 lm
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

Housing


- Pierced aluminum housing


Finish

- See finishes on page 32

Echo

A wall-mounted fixture with a fluent, curved design with a pierced shield and louvers that distribute elegant diffused wall illumination and ambient light

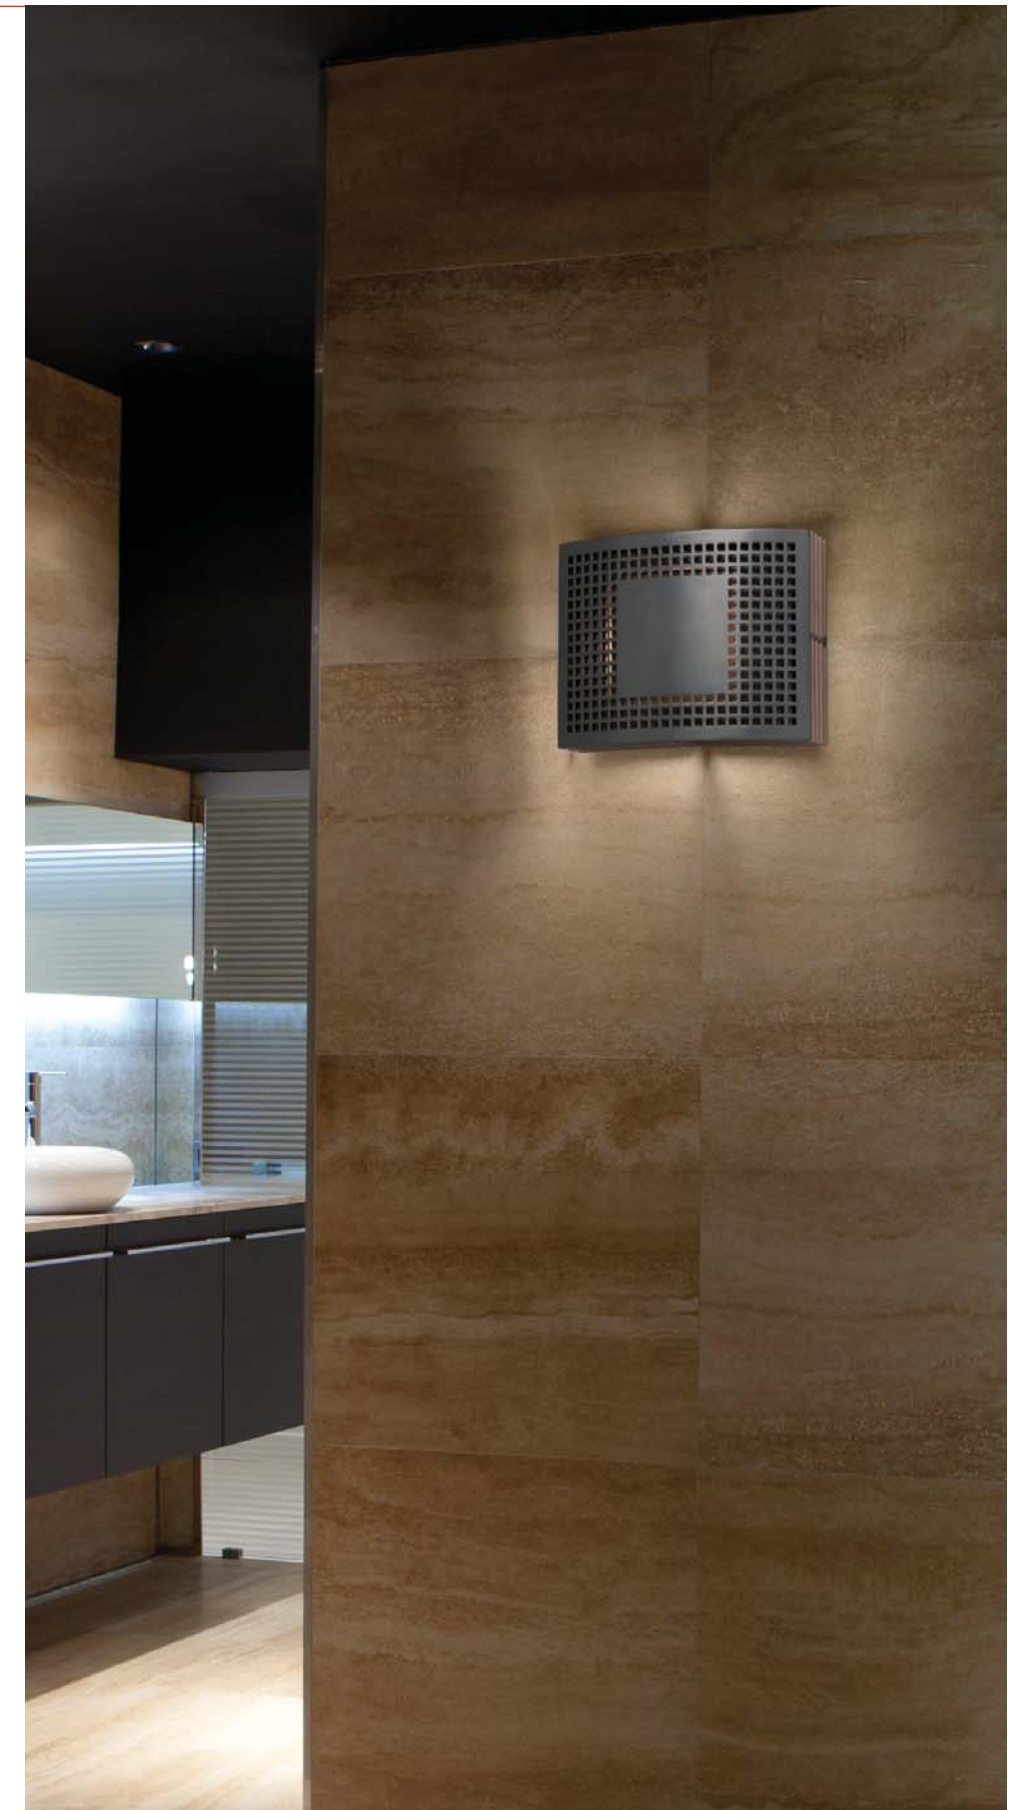

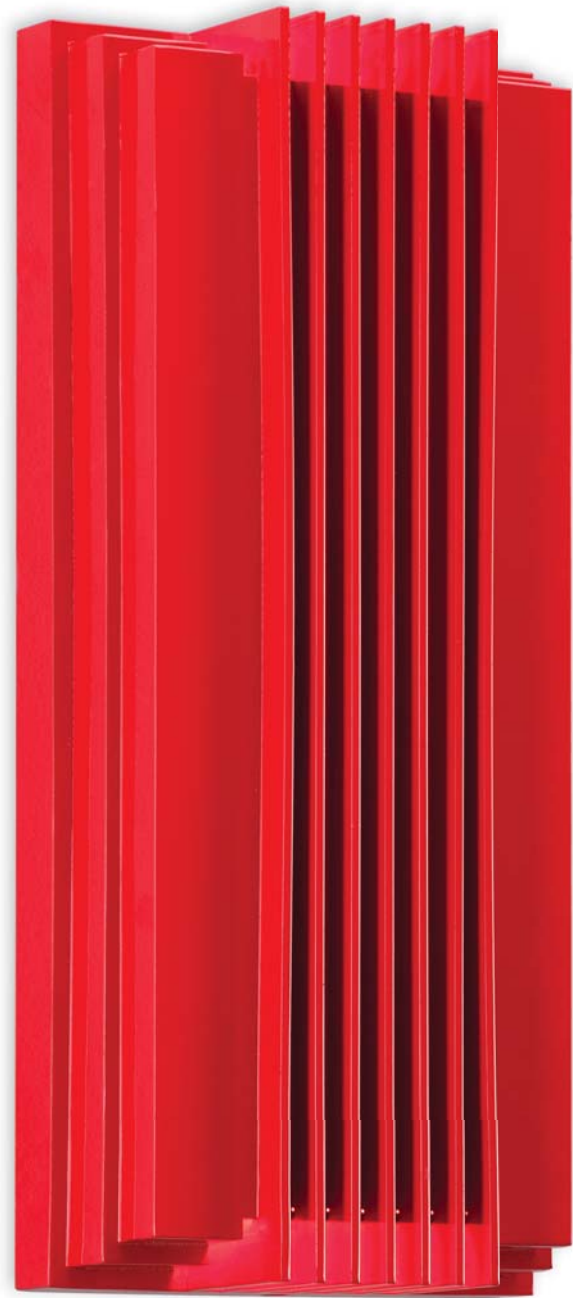

SS4018-RD

SS4018

Fixture

- 7" w x 15" h x 3¼" p
- ADA
- 120V 24W LED, 1680 lm
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

Housing

- Diecast aluminum housing

Finish

- See finishes on page 32



Radiator

A decorative, retro-style sconce with top and bottom louvers directing a vertical wash of light



SS4014-TGP

SS4014

Fixture


- 7½" w x 12" h x 2½" p
- ADA
- 120V 18W LED, 1260 lm
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

Housing

- Architectural aluminum

Finish

- See finishes on page 32

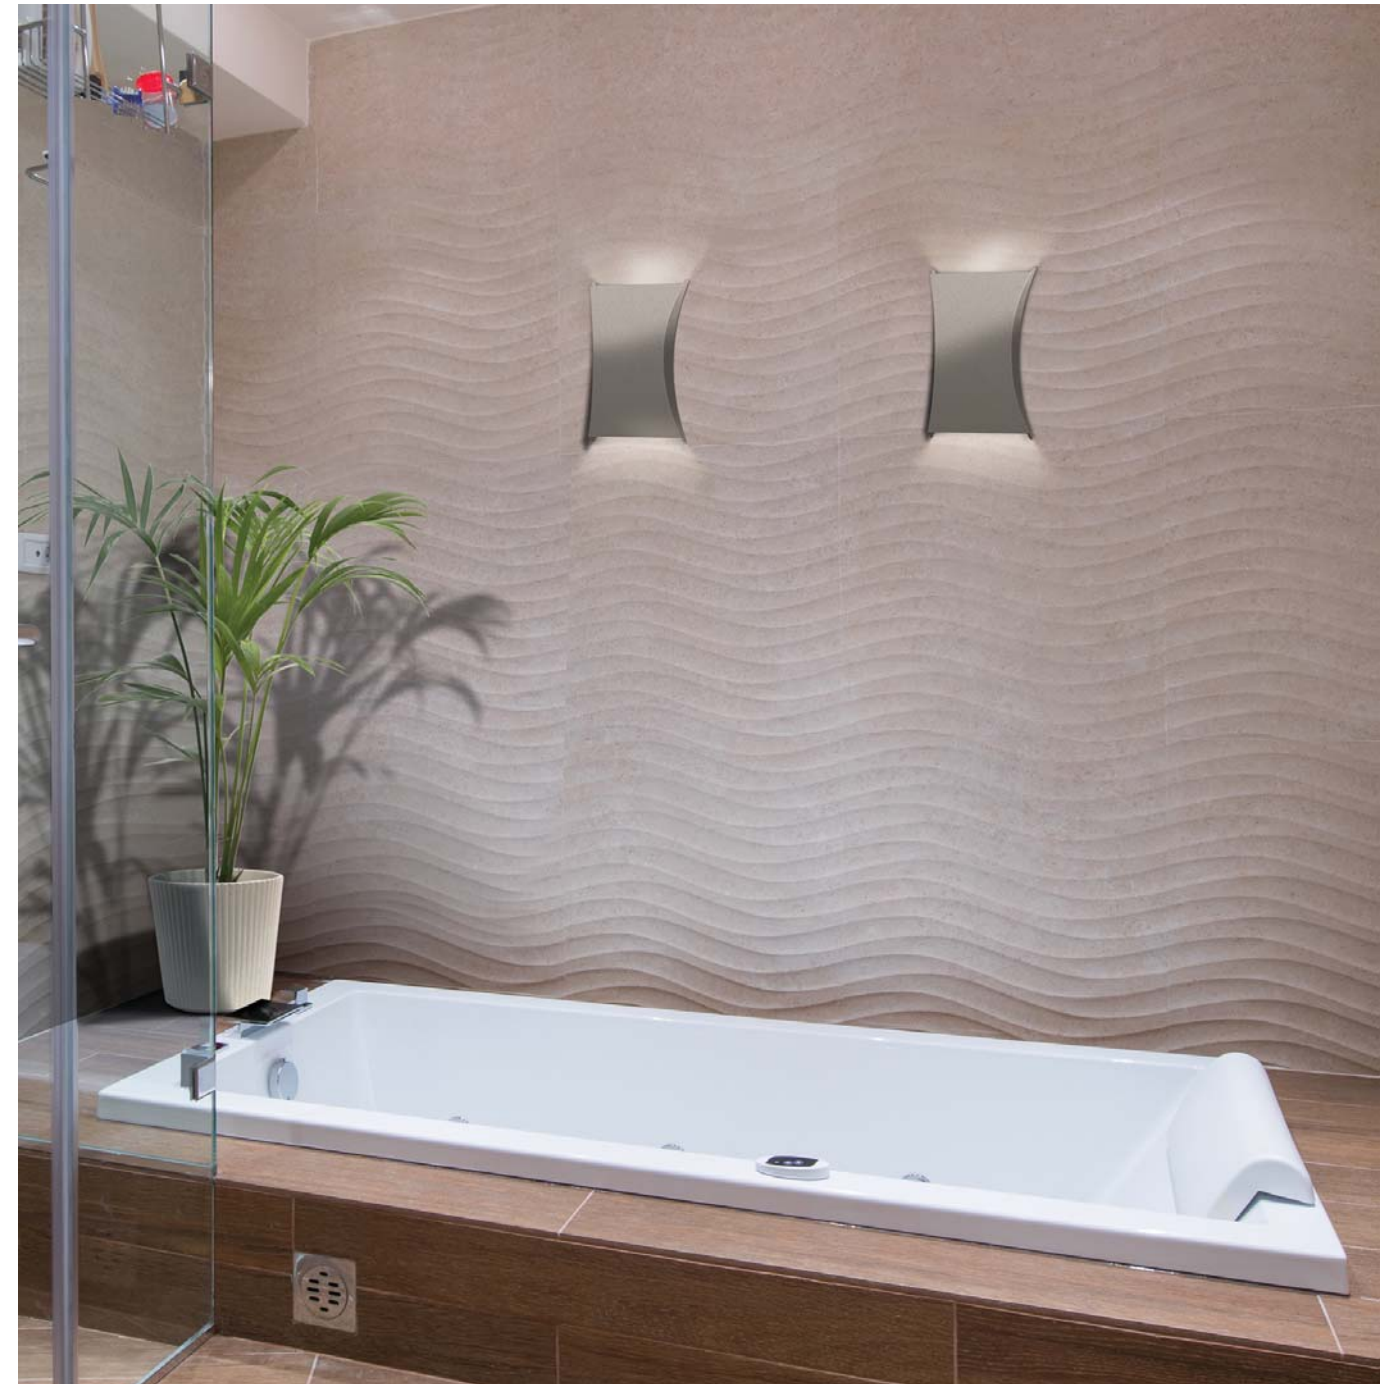

Contour

An elegant silhouette sconce casting soft, warm illumination top and bottom



Glow

A flat, framed fixture emitting light from the interior around a front colored plate and from behind for a surrounding soft glow



SS4005-TGP-TTL

SS4005

Fixture

- 9" w x 16" h x 3¾" p
- ADA
- 120V 36W LED, 2520 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp listing

Housing

- Architectural aluminum housing and accent plate

Finish

- See finishes on page 32
- Specify two finish colors: Outer housing color first, then inner accent plate color



Glow Linear

An elegant, distinctive luminaire that glows around a front colored plate and illuminates walls with a dramatic light pattern



SS4009-MB-WT

SS4009

Fixture

- 6½" w x 24½" h x 3¼" p
- ADA
- 120V 36W LED, 2520 lm
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp listing

Housing

- Architectural aluminum housing and accent plate

Finish

- See finishes on page 32
- Specify two finish colors: Outer housing color first, then inner accent plate color



SS4007-MB-GA

SS4007

Fixture

- 6" w x 12" h x 3/4" p
- ADA
- 120V 24W LED, 1680 lm
2700°K ±50° 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for damp location

Housing

- Architectural aluminum housing and accent plate

Finish

- See finishes on page 32
- Specify two finish colors: Outer housing color first, then inner accent plate color



Aura

A framed sconce with soft illumination around the front color plate and light emitting left and right to create a striking wash on the walls



SS2002A-WT-BLU
WIFI



SS2002B-PNA-TNG
RESTROOM



SS2002C-MB-LG
MARTINI



SS2002D-TBZ-AMB
JAVA



SS2002E-TNG-TNG
SMOKING



SS2002F-BLU-BLU
TAKE A DIP

SS2002

Fixture

- 10" w x 10" h x 2¾" p
- ADA
- 120V 18W LED, 1260 lm
2700°K ±50°, 90 CRI
- Incandescent dimming
- Wall mount
- UL/C-UL listed for wet location

Housing

- Architectural aluminum housing
- CNC lasered aluminum accent plate
- Aluminum mounting plate
- Acrylic lens

Finish

- See finishes on page 32
- Specify two finish colors: Outer housing color first, then inner accent plate color



Waymark

Colorful wall plates attract and inform with illuminated custom artwork in a variety of color options

Finishes

Standard and Specialty Finishes can be specified for all fixtures, unless otherwise noted.


Standard Finishes



ABL Aegean Blue



BLU Blue




TTL Tahitian Teal




LG Lime Green



HG Hunter Green




TNG Tangerine



RD Red



BK Gloss Black



MB Matte Black



GWT Gloss White



WT Semi-Gloss White



DVG Dove Gray




FLG Flannel Gray




PNA Painted Natural Aluminum



SS Satin Silver



TGP Textured Graphite




PNC Painted Natural Copper



BZP Bronze Patina



TBZ Textured Bronze



BB Burnished Bronze

Specialty Finishes



GA Galvanized



SA Satin Aluminum*

Coastal Finish Option

The Coastal Finish is a coating which protects finishes on fixtures installed in coastal climates. To specify, add "-C" to end of order number.

*Satin Aluminum finish not available for Entity (SS4021)



All CSL Architectural Fixtures:

- are UL and C-UL approved for wet or damp locations; see individual fixture details
- are compatible with incandescent dimming, unless otherwise noted
- are offered with Coastal Finish option, see page 32



Index

1012	2	4005	25
2000	12	4007	28
2000A	12	4009	27
2001	5	4014	22
2001A	5	4015	6
2002	30	4017	14
3028C	11	4018	20
4001	16	4019	15
4003	18	4021	9
		Finish Palette	32



A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue
City of Industry CA 91744
Tel: 626.336.4511
Fax: 626.330.4266
www.csllighting.com



C-CARCH06-16



782042296350

