



[trizo]²¹®

Handmade in Belgium

TRIZO21 TRANSLATES LIGHT INTO SHAPES

TO CREATE AN ATMOSPHERE, A CONCEPT, A PROJECT, A...

AUSTERE-
CHANDELIER p.6



AUSTERE-
ELEMENTS p.12



AUSTERE-T p.18



AUSTERE-W p.26



CODE p.34



CODE WALL p.34



IZOR SU p.40



IZOR W/C p.40



LIPPS W/C p.44



MINI-PI IN p.46



AUSTERE-F p.18



AUSTERE-S p.22




BOULY p.28



BY-O p.32



CRI-ATE SU p.38



CRI-ATE W/C p.38



KY-O p.42



LIPPS SU p.44



MINI-PI UP p.50



NAGA p.52



I-TRO

p.54



N-TRO

p.56



R RANGE IN

p.64



R RANGE UP

p.74



SCAR-LITE

p.92



SIRENS SU

p.96



TIZOR W/C

p.100



WY-O

p.102



PIN-IN

p.58



PIN-UP

p.62



SCAR-LED

p.84



SCAR-LED
TABLE

p.90



SIRENS W/C

p.96



TIZOR SU

p.100





AUSTERE-CHANDELIER 2YV6 5503

AUSTERE - CHANDELIER

Hans Verstuyft




AUSTERE-CHANDELIER 1YV3 2003

CE  IP40  eco

3 x LED array (included) 6,2W
warm white : 2700K - 3 x 490lm - CRI >90

more information see: www.trizo21.com

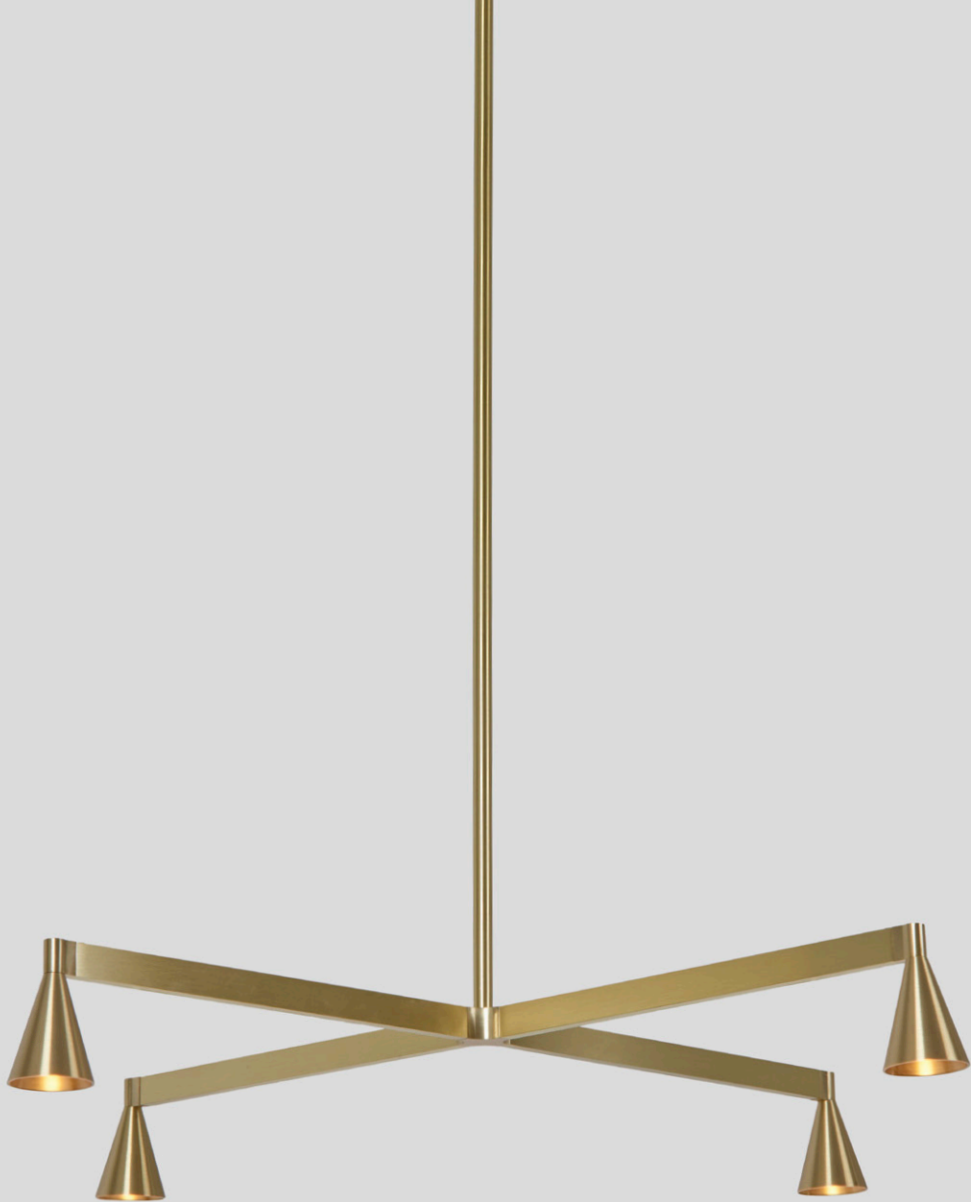



AUSTERE-CHANDELIER 1XV4 7003



AUSTERE-CHANDELIER 3YV9 2773



AUSTERE-CHANDELIER 1XV4 7003

AUSTERE - ELEMENTS

Hans Verstuylt



AUSTERE-ELEMENTS


CE  IP40  eco

LED array (included) 6,2W per light element
warm white : 2700K - 490lm - CRI >90

more information see: www.trizo21.com






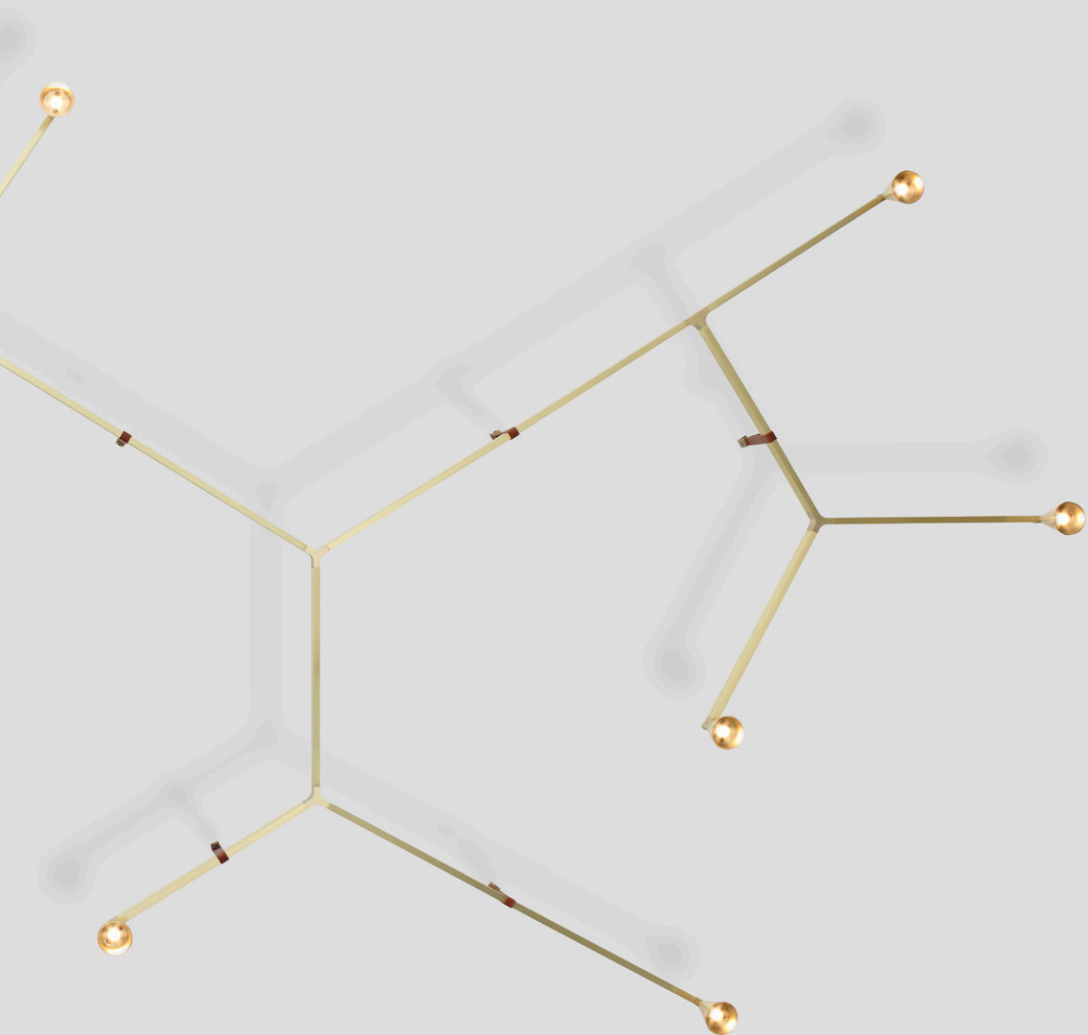



AUSTERE-ELEMENTS

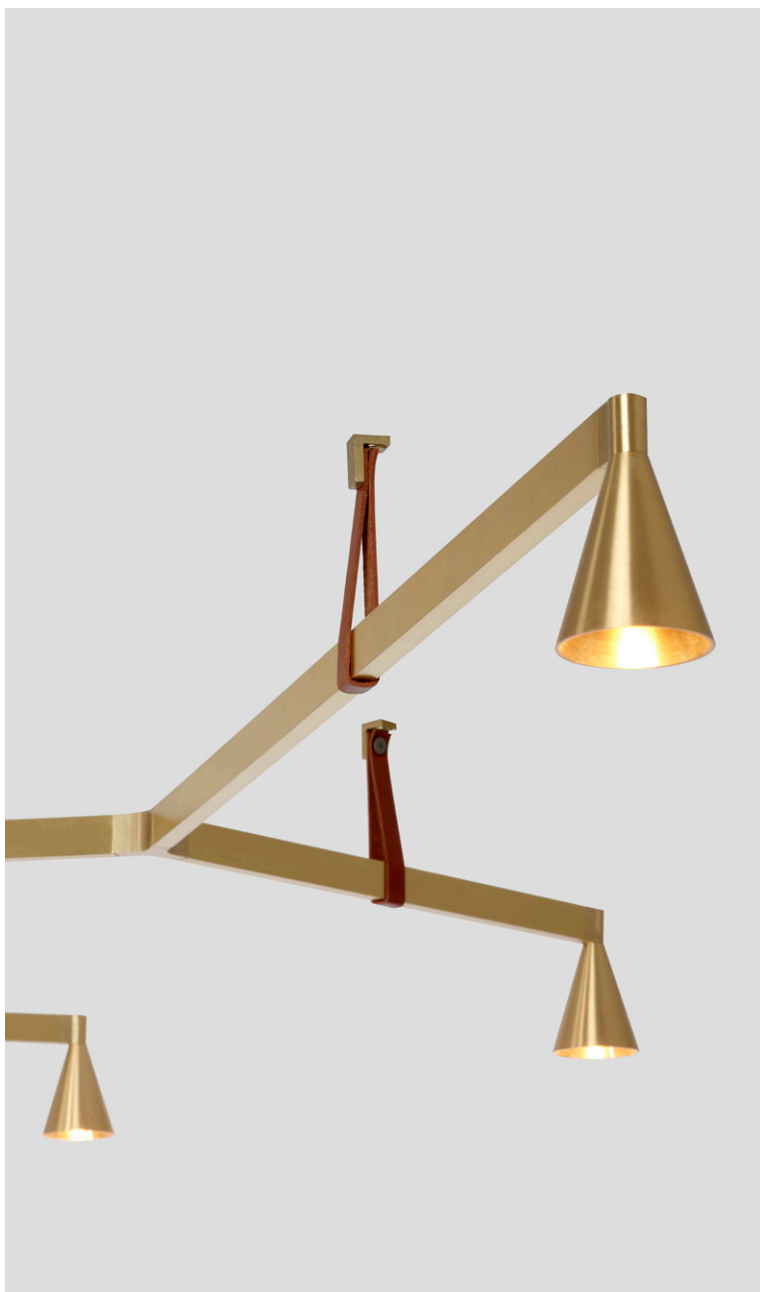

AUSTERE-ELEMENTS

AUSTERE



Hans Verstuyft



AUSTERE-F

CE IP40 eco

230V - plugdriver with push button dimmer

1 x LED array (included) 6,2W - 350mA

warm white : 2700K - 490lm - CRI >90



AUSTERE-T

CE IP40 eco

230V - plugdriver with push button dimmer

1 x LED array (included) 6,2W - 350mA

warm white : 2700K - 490lm - CRI >90





AUSTERE-F



AUSTERE-T



AUSTERE

Hans Verstuyft



AUSTERE-S 1000 built-in



350mA - driver excluded
1 x LED array (included) 6,2W
warm white : 2700K - 490lm - CRI >90
available for false and concrete ceiling
IP44 on demand



AUSTERE-SD 1000 built-in



230V - driver included (to build in, not dimmable)
1 x LED array (included) 6,2W - 350mA
warm white : 2700K - 490lm - CRI >90
available for false and concrete ceiling
IP44 on demand

AUSTERE

Hans Verstuyft



AUSTERE-S 1000 + CABLE built-in




350mA - driver excluded
1 x LED array (included) 6,2W
warm white : 2700K - 490lm - CRI >90
available for false and concrete ceiling
IP44 on demand



AUSTERE-SD 1000 + CABLE built-in



230V - driver included (to build in, not dimmable)
1 x LED array (included) 6,2W - 350mA
warm white : 2700K - 490lm - CRI >90
available for false and concrete ceiling
IP44 on demand

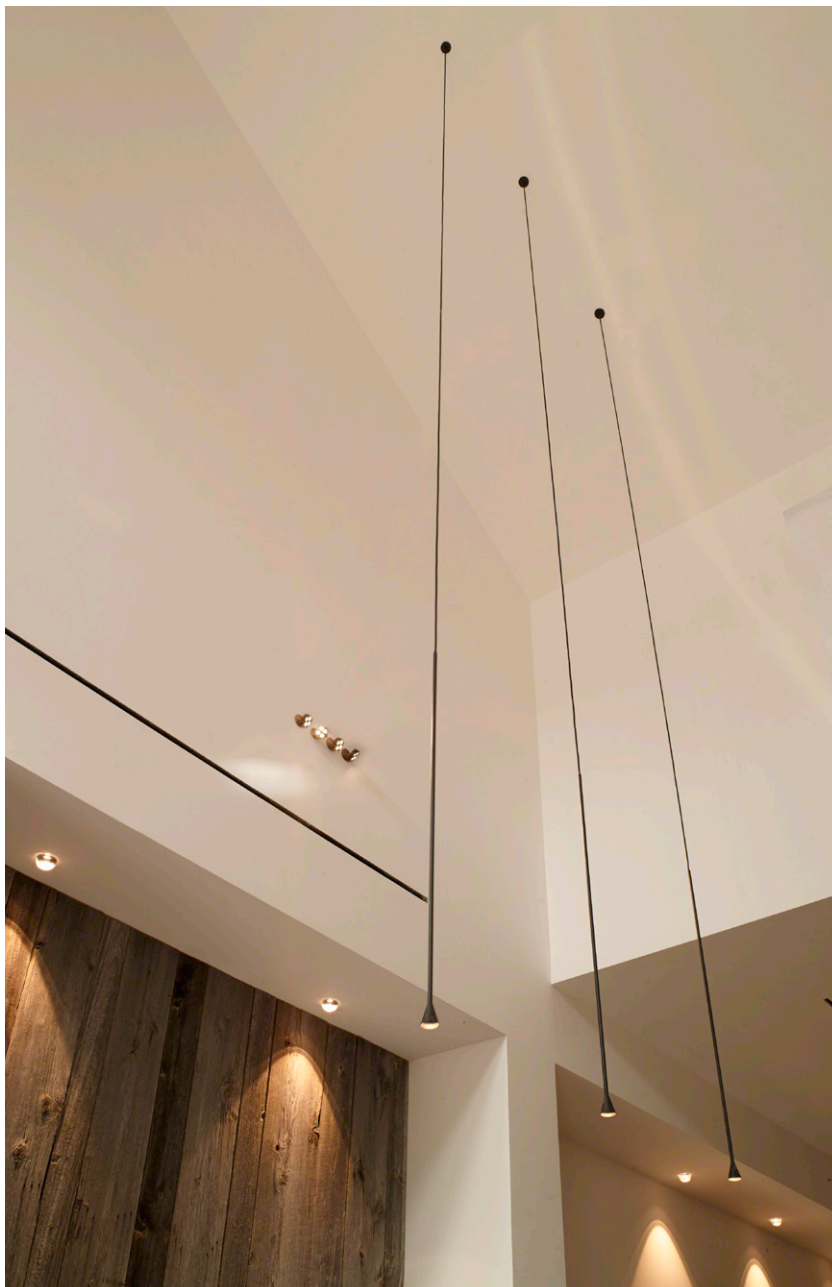

AUSTERE-S 1000 + **CABLE** built-in / **MINI-PI 1 IN** / **BOULY 16** built-in



AUSTERE

Hans Verstuylt



AUSTERE-W

CE  IP40  eco

230V - plugdriver with push button dimmer

1 x LED array (included) 6,2W - 350mA

warm white : 2700K - 490lm - CRI >90

BOULY

Bruno Van Meenen



BOULY 16D SILVER



230V - driver included (to build in, not dimmable)

1 x LED array (included) 11W

warm white : 2700K - 1035lm - CRI >90

available for false and concrete ceiling



BOULY 16D GOLD



230V - driver included (to build in, not dimmable)

1 x LED array (included) 11W

warm white : 2700K - 1035lm - CRI >90

available for false and concrete ceiling



BOULY 4D



230V - driver included (to build in, not dimmable)

4 x (power) LED 1.2W / 0.96W (included)

cold white : 6000K - 440lm - CRI >75

warm white : 2700K - 456lm - CRI >93

available for false and concrete ceiling





BOULY OUTDOOR

Bruno Van Meenen



BOULY 16D OUT SILVER



230V - driver included (to build in, not dimmable)

1 x LED array (included) 11W

warm white : 2700K - 1035lm - CRI >90

available for false and concrete ceiling



BOULY 16D OUT GOLD



230V - driver included (to build in, not dimmable)

1 x LED array (included) 11W

warm white : 2700K - 1035lm - CRI >90

available for false and concrete ceiling



BOULY 4D OUT



230V - driver included (to build in, not dimmable)

4 x (power) LED 1.2W / 0.96W (included)

cold white : 6000K - 440lm - CRI >75

warm white : 2700K - 456lm - CRI >93

available for false and concrete ceiling

BY-O

Bruno Van Meenen



BY-O 24 DME

CE  IP30 

230V - driver included (not dimmable)

24 x SMD LED (included), 6,2W

warm white : 2850K - 460lm - CRI >90



BY-O 48 GL

CE  IP50 

24Vdc - driver excluded

48 x SMD LED (included), 12W

warm white : 2850K - 920lm - CRI >90



BY-O 60 DGL

CE  IP50 

230V - driver included (not dimmable)

60 x SMD LED (included), 15W

warm white : 2850K - 1140lm - CRI >90



BY-O 48 DGL



CODE

Bruno Van Meenen



CODE 1 IN



230V - GU10 - 1 x QPAR16 max. 35W or LED
12V - GU5.3 - transformer excluded
1 x QR-CBC51 (alu reflector) max. 35W



CODE 2 OUT



230V - GU10 - 2 x QPAR16 max. 35W or LED
12V - GU5.3 - transformer excluded
2 x QR-CBC51 (alu reflector) max. 35W



CODE WALL IN



230V - G9 - 1 x QT14 max. 60W
12V - GY6.35 - transformer excluded
1 x QT12 max. 50W

CODE LED

Bruno Van Meenen



CODE 1 IN LED

CE IP40 eco

230V - driver included

4 x LED (included) 0.96W

WARM WHITE : 2700K - 456lm - CRI >93

4 x power LED (included) 1.2W

COLD WHITE : 6000K - 440lm - CRI >75



CODE 2 IN LED

CE IP40 eco

230V - driver included

8 x LED (included) 0.96W

WARM WHITE : 2700K - 912lm - CRI >93

8 x power LED (included) 1.2W

COLD WHITE : 6000K - 880lm - CRI >75



CODE WALL OUT LED

CE IP55 eco

350mA - driver excluded

1 lighting side : 4 x LED (included) 0.96W

2 lighting sides : 8 x LED (included) 0.96W

WARM WHITE : 2700K - 456lm (1 side) / 912lm (2 sides) - CRI >93

1 lighting side : 4 x power LED (included) 1.2W

2 lighting sides : 8 x power LED (included) 1.2W

COLD WHITE : 6000K - 440lm (1 side) / 880lm (2 sides) - CRI >75






CRI-ATE GT-H / R51 UP LED

CRI-ATE

Bruno Van Meenen



CRI-ATE 122 GT2-H

CE  IP20  eco

230V - gear included

G5 - 2 x T5 28W/54W

transformer included

G53 - 2 x QR111 max. 50W or R111 LED



CRI-ATE GT1-W/C

CE  IP40  eco

230V - G5 - gear included - 2 x T5

G53 - transformer included

1 x QR111 max. 50W or LED



IZOR 14 GT3-H

CE IP20 eco

230V - gear included

2G11 - 1 x TC-L 24W

transformer included

G53 - 2 x QR111 max. 50W or R111 LED



IZOR 42 GT-W/C

CE IP20 eco

230V - gear included

2G11 - 3 x TC-L 24W

transformer included

G53 - 3 x QR111 max. 50W or R111 LED



IZOR GT-WC





KY-O 30 GL

CE IP50 eco

24Vdc - driver excluded

30 x SMD LED (included), 7.5W

warm white : 2850K - 570lm - CRI >90



KY-O 60 ME

CE IP30 eco

24Vdc - driver excluded

60 x SMD LED (included), 15W

warm white : 2850K - 1140lm - CRI >90

LIPPS

Luc Ramael



LIPPS SU




230V - dimmable driver included (1-10V or pushdim or TRIAC)

Ø 200 - LED array (included) 6,2W - 1 x 500lm - 700mA

Ø 300 - LED array (included) 9W - 3 x 250lm - 350mA

Ø 600 - LED array (included) 36,2W - 8 x 375lm - 500mA

warm white : 2700K - CRI >90



LIPPS W/C




230V - dimmable driver included (1-10V or pushdim or TRIAC)

Ø 200 - LED array (included) 6,2W - 1 x 500lm - 700mA

Ø 300 - LED array (included) 9W - 3 x 250lm - 350mA

Ø 600 - LED array (included) 36,2W - 8 x 375lm - 500mA

warm white : 2700K - CRI >90

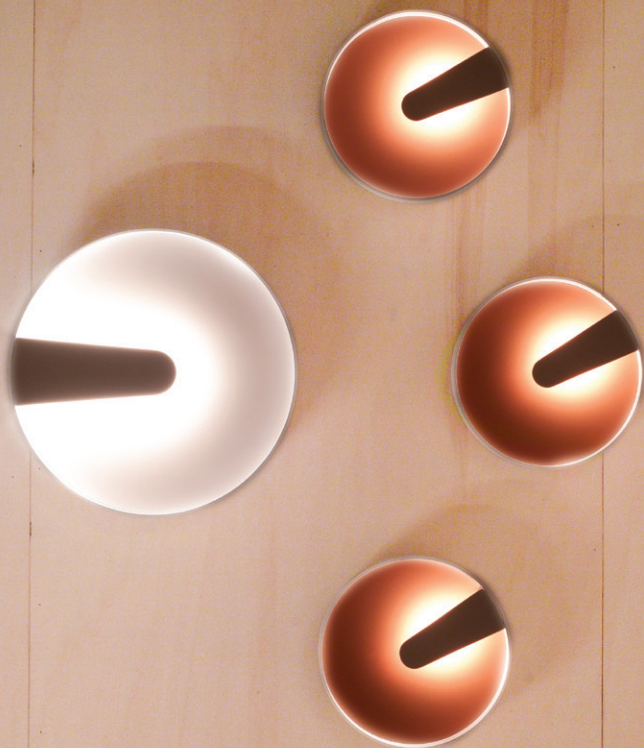

MINI-PI

Bruno Van Meenen



MINI-PI 1 IN



350mA - driver excluded

4 x LED (included) 0.96W

WARM WHITE : 2700K - 456lm - CRI >93

4 x power LED (included) 1.2W

COLD WHITE : 6000K - 440lm - CRI >75



MINI-PI 2 IN



350mA - driver excluded

8 x LED (included) 0.96W

WARM WHITE : 2700K - 912lm - CRI >93

8 x power LED (included) 1.2W

COLD WHITE : 6000K - 880lm - CRI >75



MINI-PI 1 IN



MINI-PI | IN



MINI-PI 1 IN



MINI-PI

Bruno Van Meenen



MINI-PI 1 UP

CE  IP40 

230V - driver included (not dimmable)

4 x LED (included) 0.96W

WARM WHITE : 2700K - 456lm - CRI >93

4 x power LED (included) 1.2W

COLD WHITE : 6000K - 440lm - CRI >75



MINI-PI 2 UP

CE  IP40 

230V - driver included (not dimmable)

8 x LED (included) 0.96W

WARM WHITE : 2700K - 912lm - CRI >93

8 x power LED (included) 1.2W

COLD WHITE : 6000K - 880lm - CRI >75

NAGA

Bruno Van Meenen



NAGA

CE  IP20  eco


230V - GU10 LED





I-TRO

Bruno Van Meenen

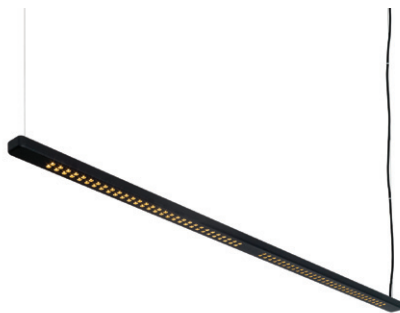

I-TRO D+B

CE  IP30  eco

100-240V - driver included (dimmable 1-10V)

1 lighting side : 120 x SMD LED (included) - 2280lm - 30W

2 lighting sides : 240 x SMD LED (included) - 4560lm - 60W

warm white : 2850K - CRI >90



N-TRO

Bruno Van Meenen



N-TRO D+B

CE  IP30  eco

100-240V - driver included (dimnable 1-10V)

240 x SMD LED (included), 60W

warm white : 2850K - 4560lm - CRI >90

PIN-IN

Bruno Van Meenen



PIN-IN 1

CE  IP20

12V - G53 - transformer excluded

1 x QR111 max. 75W or LED



PIN-IN 2

CE  IP20

12V - G53 - transformer excluded

2 x QR111 max. 75W or LED









PIN-UP

Bruno Van Meenen



PIN-UP 1 ROUND

CE  IP20

230V - G53 - transformer included

1 x QR111 max. 50W or LED



PIN-UP 1 SQUARE

CE  IP20

230V - G53 - transformer included

1 x QR111 max. 50W or LED



PIN-UP 2

CE  IP20

230V - G53 - transformer included

2 x QR111 max. 50W or LED

R RANGE IN

Bruno Van Meenen



R51 IN

CE   IP20

230V - GU10 - 1 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer excluded

1 x QR-CBC51 (alu reflector) max. 50W or LED



R52 IN

CE   IP20

230V - GU10 - 2 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer excluded

2 x QR-CBC51 (alu reflector) max. 50W or LED



R54 IN

CE   IP20

230V - GU10 - 4 x QPAR16 max. 50W or LED

or


230V - GU5.3 - transformer excluded

4 x QR-CBC51 (alu reflector) max. 50W or LED





R54 IN

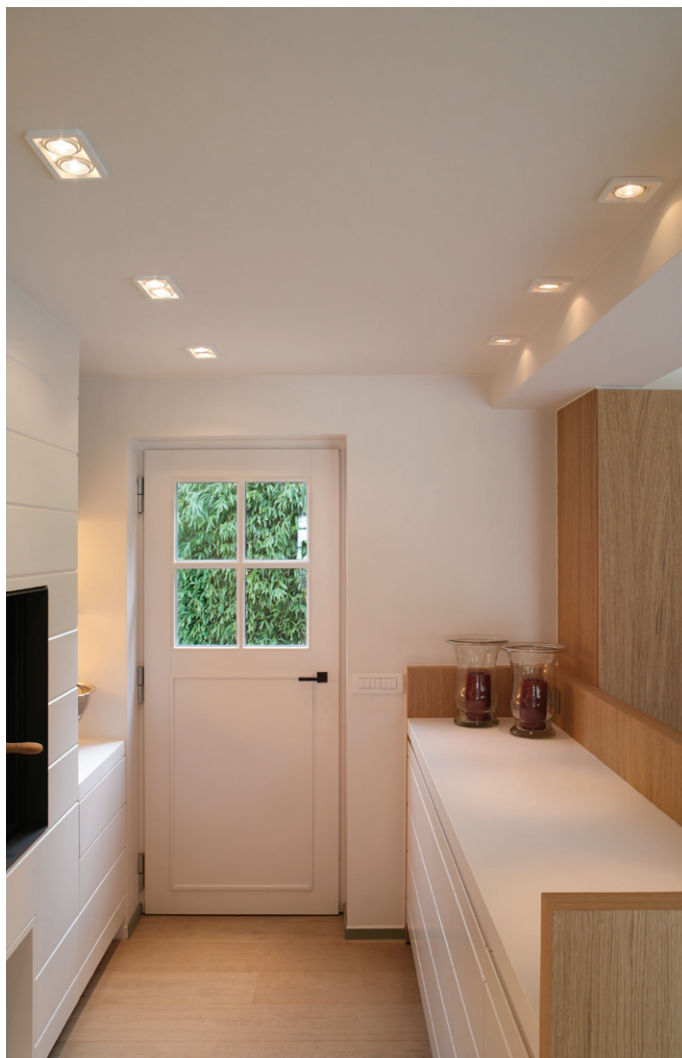

R51 IN / R52 IN



R RANGE IN LED

Bruno Van Meenen



R51 IN LED



350mA - driver excluded

4 x LED (included) 0.96W

WARM WHITE : 2700K - 456lm - CRI >93

4 x power LED (included) 1.2W

COLD WHITE : 6000K - 440lm - CRI >75



R52 IN LED



350mA - driver excluded

8 x LED (included) 0.96W

WARM WHITE : 2700K - 912lm - CRI >93

8 x power LED (included) 1.2W

COLD WHITE : 6000K - 880lm - CRI >75



R54 IN LED



350mA - driver excluded

16 x LED (included) 0.96W

WARM WHITE : 2700K - 1824lm - CRI >93

16 x power LED (included) 1.2W

COLD WHITE : 6000K - 1760lm - CRI >75

R RANGE IN

Bruno Van Meenen



R07 IN

CE  IP20

12V - BA15d - transformer excluded

1 x QR70 max. 50W or LED



R70 IN

CE  IP20

12V - BA15d - transformer excluded

2 x QR70 max. 50W or LED



R111 IN



R RANGE IN

Bruno Van Meenen



R110 IN

CE  IP20

12V - G53 - transformer excluded

1 x QR111 max. 75W or LED



R111 IN

CE  IP20

12V - G53 - transformer excluded

2 x QR111 max. 75W or LED

R RANGE UP

Bruno Van Meenen



R51 UP

CE  IP20

230V - GU10 - 1 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer included

1 x QR-CBC51 (alu reflector) max. 35W or LED



R52 UP

CE  IP20

230V - GU10 - 2 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer included

2 x QR-CBC51 (alu reflector) max. 35W or LED



R54 UP

CE  IP20

230V - GU10 - 4 x QPAR16 max. 50W or LED

or

230V - GU5.3 - transformer included

4 x QR-CBC51 (alu reflector) max. 35W or LED



R07 UP



R51 UP LED / R52 UP LED

R RANGE UP LED

Bruno Van Meenen



R51 UP LED

CE  IP40 

230V - driver included (not dimmable)

4 x LED (included) 0.96W

WARM WHITE : 2700K - 456lm - CRI >93

4 x power LED (included) 1.2W

COLD WHITE : 6000K - 440lm - CRI >75



R52 UP LED

CE  IP40 

230V - driver included (not dimmable)

8 x LED (included) 0.96W

WARM WHITE : 2700K - 912lm - CRI >93

8 x power LED (included) 1.2W

COLD WHITE : 6000K - 880lm - CRI >75



R54 UP LED

CE  IP40 

230V - driver included (not dimmable)

16 x LED (included) 0.96W

WARM WHITE : 2700K - 1824lm - CRI >93

16 x power LED (included) 1.2W

COLD WHITE : 6000K - 1760lm - CRI >75

R RANGE UP

Bruno Van Meenen



R07 UP

CE  IP20

230V - BA15d - transformer included

1 x QR70 max. 50W or LED



R70 UP

CE  IP20

230V - BA15d - transformer included

2 x QR70 max. 50W or LED



R70 UP



R111 UP

R RANGE UP

Bruno Van Meenen



R110 UP

CE  IP20

230V - G53 - transformer included

1 x QR111 max. 50W or LED




R111 UP

CE  IP20

230V - G53 - transformer included

2 x QR111 max. 50W or LED





SCAR-LED

Bruno Van Meenen



SCAR-LED 1F built-in 45

CE  IP40 

350mA - driver excluded

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75



SCAR-LED 1FD built-in 60

CE  IP40 

230V - driver included (to build in)

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75



SCAR-LED 1FDS built-in 60

CE  IP40 

230V - driver included (to build in)

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75



SCAR-LED 1FD built-in 60



SCAR-LED 1FDS



SCAR-LED

Bruno Van Meenen



SCAR-LED 1FD



230V - driver included (not dimmable)

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75



SCAR-LED 1FDS



230V - driver included (not dimmable)

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75





SCAR-LED

Bruno Van Meenen



SCAR-LED TABLE



230V - driver included & switch on cable

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75



SCAR-LED TABLE built-in



230V - driver included & switch on cable

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75

SCAR-LITE

Bruno Van Meenen



SCAR-LITE



230V - driver included

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75

more information see: www.trizo21.com



SCAR-LITE USB



230V - driver included (not dimmable)

USB charger incl. - compatible with iPad/iPhone
and other USB chargeable devices

1 x LED (included) 0.96W

WARM WHITE : 2700K - 114lm - CRI >93

1 x power LED (included) 1.2W

COLD WHITE : 6000K - 110lm - CRI >75

more information see: www.trizo21.com





SCAR-LITE USB



SCAR-LITE



SIRENS



Olga Bielawska



SIRENS SU

CE  IP50 

230V

E27 - energy saving bulbs (LED or fluo)



SIRENS W/C

CE  IP50 

230V


E27 - energy saving bulbs (LED or fluo)





TIZOR

Bruno Van Meenen



TIZOR 2400-H

CE IP40 eco

230V - gear included

G5 - 4 x T5 28W/54W

G5 - 6 x T5 28W/54W



TIZOR 1200 GT1-W/C

CE IP40 eco

230V - G5 - gear included

2/4 x T5 28W/54W

G53 - transformer included

3 x QR111 max. 50W or LED



KWA-ADJU 2T / TIZOR 1200 GT1-W/C





WY-O GL

CE  IP50 

24Vdc - driver excluded

1 lighting side : 36 x SMD LED (included) - 685lm - 9W

2 lighting sides : 72 x SMD LED (included) - 1370lm - 18W

warm white : 2850K - CRI >90



WY-O DME

CE  IP30 

230V - driver included (not dimmable)

1 lighting side : 36 x SMD LED (included) - 685lm - 9W

2 lighting sides : 72 x SMD LED (included) - 1370lm - 18W

warm white : 2850K - CRI >90



